

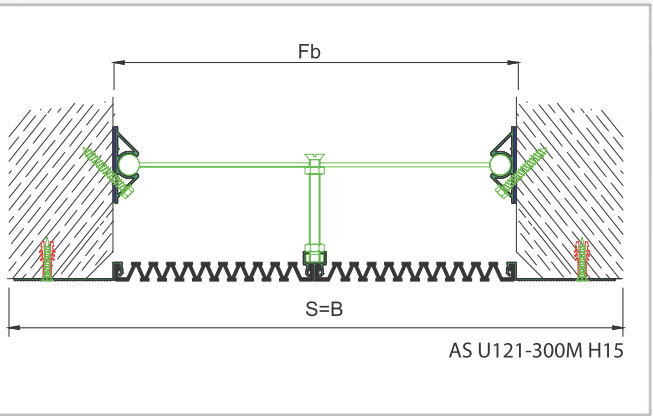
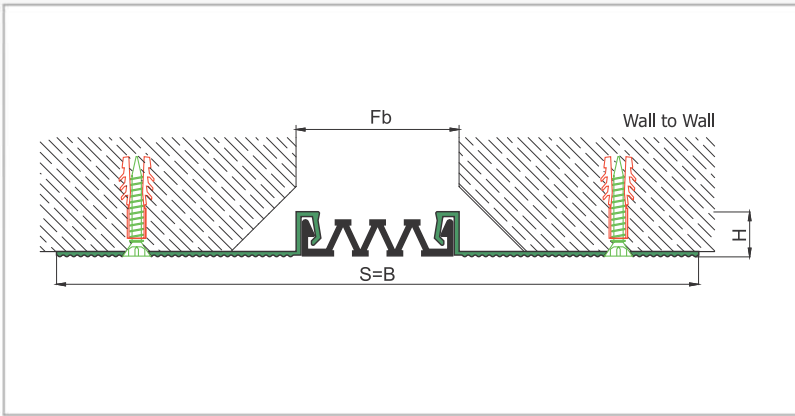


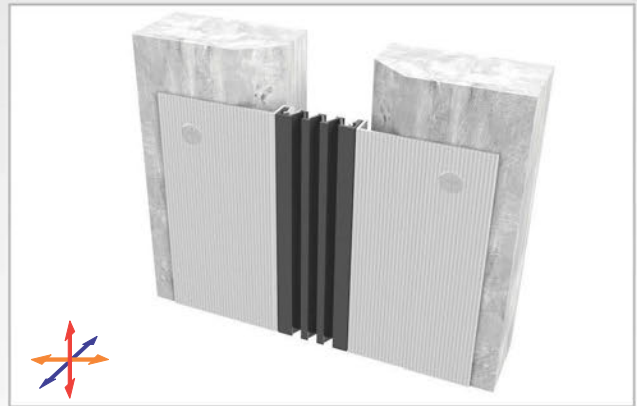

AS U121 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Owing to wide frame, it's especially recommended for applications at damaged or chamfered walls. Ribbed elastomeric gasket gains the profile a remarkable movement ability and compensates level differences on both sides of the wall. Slide-in gasket system lets the profile to be used at exterior applications as well as interior areas. Profiles up to 150 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a connector profile.

- Application Areas** : Indoor & Outdoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

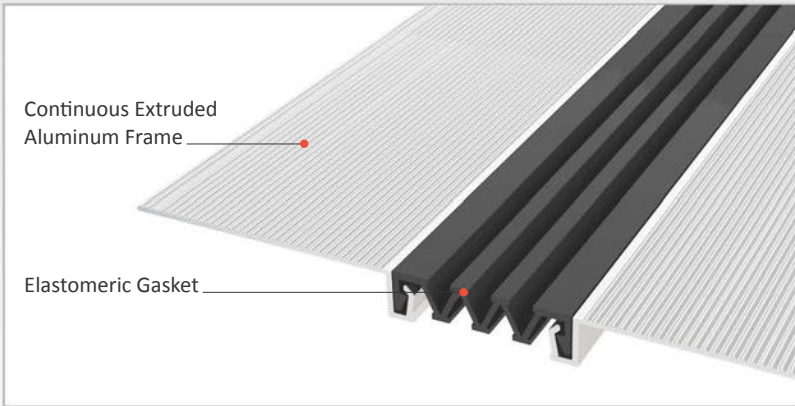


\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS    **BLACK**    GREY    BEIGE    Custom Colors available.


| LOCATION     | MODEL        | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|--------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Wall to Wall | AS U121-030  | 30          | 15            | 177                  | 177                  | +10 / -6        | N/A           | 3                    |
|              | AS U121-050  | 50          | 15            | 197                  | 197                  | +20 / -15       | N/A           | 3                    |
|              | AS U121-080  | 80          | 15            | 227                  | 227                  | +40 / -30       | N/A           | 3                    |
|              | AS U121-100  | 100         | 15            | 247                  | 247                  | +20 / -50       | N/A           | 3                    |
|              | AS U121-120  | 120         | 15            | 267                  | 267                  | +60 / -50       | N/A           | 3                    |
|              | AS U121-150  | 150         | 15            | 297                  | 297                  | +30 / -80       | N/A           | 3                    |
|              | AS U121-200  | 200         | 15            | 347                  | 347                  | +40 / -100      | N/A           | 3                    |
|              | AS U121-300M | 300         | 15            | 447                  | 447                  | +60 / -150      | N/A           | 3                    |

Note: Please ask for different sizes



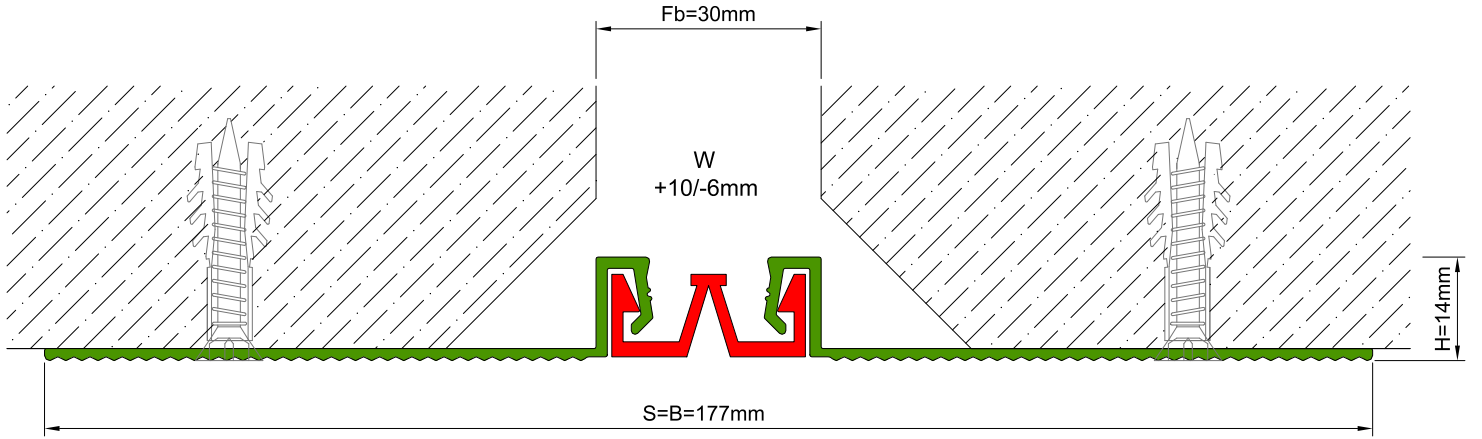

AS U121 030 H15V

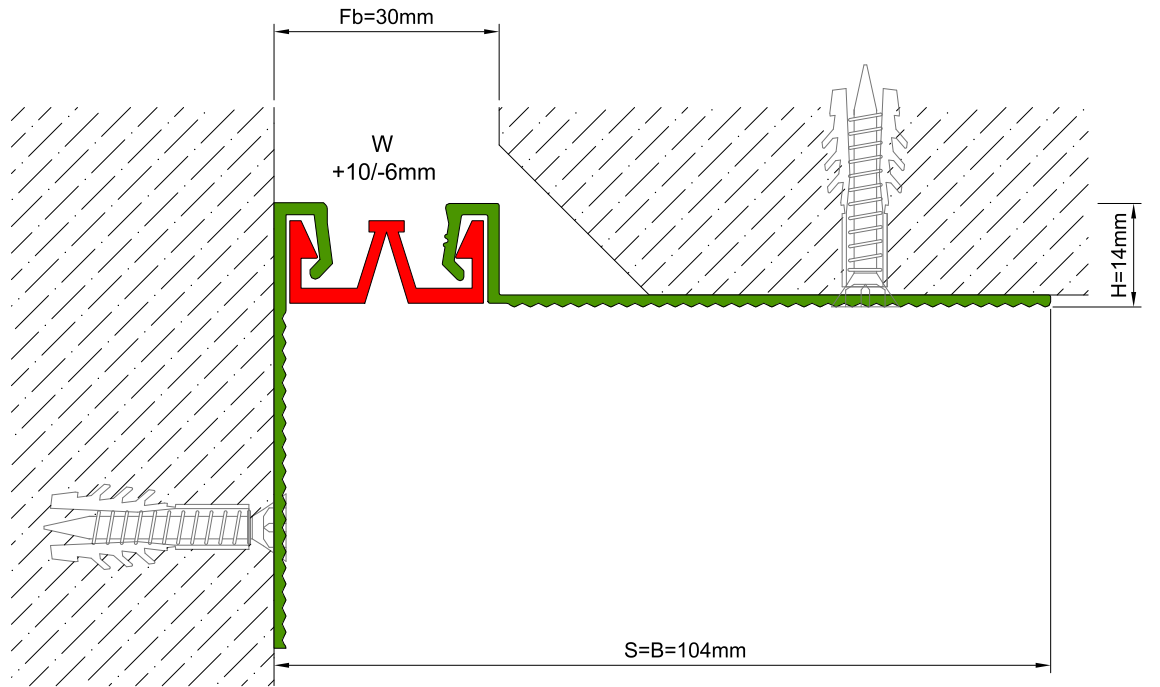

AS U121 030 H15KV

|                                  | AS U121 030   | AS U121 030K |
|----------------------------------|---|--------------|
| Fb (mm)                          | 30  | 30           |
| H (mm)                           | yaklaşık approx. 15   | 15           |
| W± (mm)                          | yaklaşık approx. +10/-6   | +10/-6       |
| Renk Color                       | Alüminyum: Natürel, Fıtiler: Siyah, gri, diğer<br>Aluminum: Natural, Inserts: Black, grey, others   |              |
| Malzeme Material                 | Alüminyum, EPDM Kauçuk(siyah), Termoplastik Kauçuk (gri ve diğer)<br>Aluminum, EPDM Rubber(black), Thermoplastic Rubber (grey and others) |              |
| Standart Uzunluk Standard Length | 3   |              |