



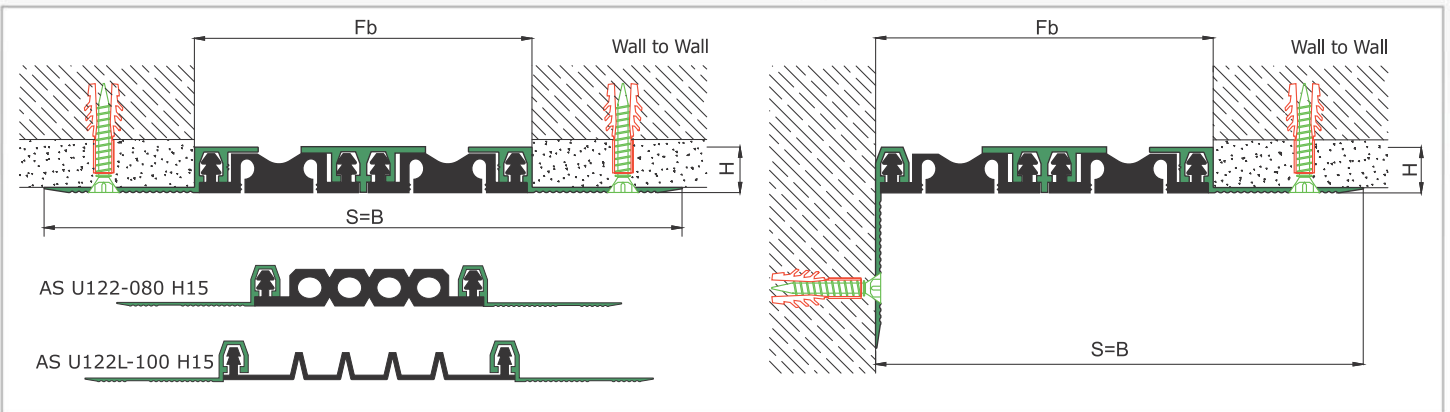

AS U122 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Push-down elastomeric gasket can be changed without demounting the profile. Profiles up to 80 mm gap are manufactured with single gasket while the wider ones are with double gaskets joined with a connector profile. For some gaps, profile is able to be applied with floor type AS U222 and this dual application brings in a decorative aspect.

- Application Areas** : Indoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

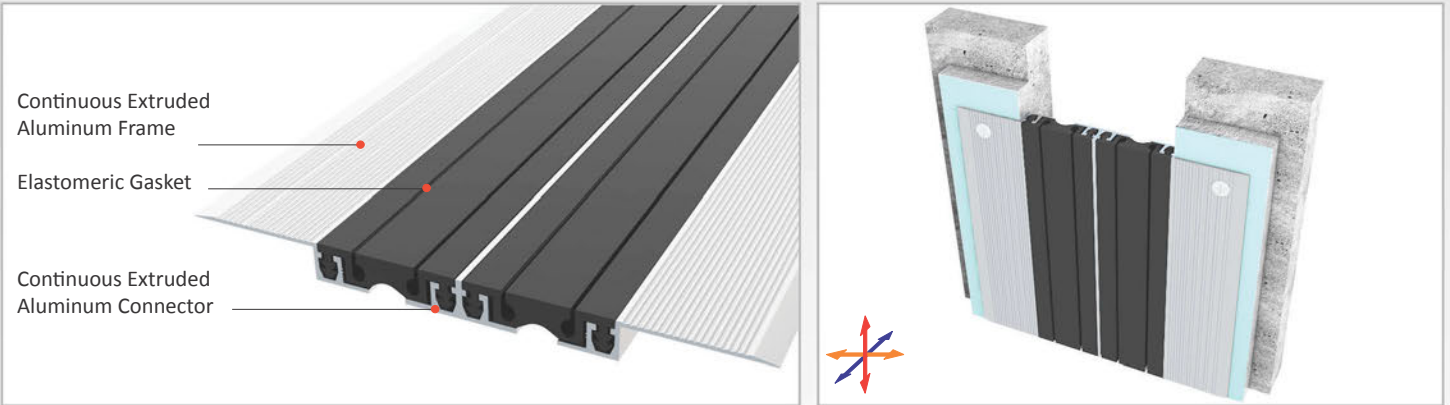


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.




| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|---------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Wall to Wall | AS U122-030 | 30 | 15 | 119 | 119 | ± 5 | N/A | 3 |
| | AS U122-050 | 50 | 15 | 139 | 139 | ± 7 | N/A | 3 |
| | AS U122-080 | 80 | 15 | 169 | 169 | ± 10 | N/A | 3 |
| | AS U122-100 | 105 | 15 | 189 | 189 | ± 14 | N/A | 3 |
| | AS U122-150 | 150 | 15 | 239 | 239 | ± 20 | N/A | 3 |
| | AS U122 L-050 | 50 | 15 | 139 | 139 | +16 / -8 | N/A | 3 |
| | AS U122 L-080 | 80 | 15 | 169 | 169 | ± 20 | N/A | 3 |
| | AS U122 L-100 | 100 | 15 | 189 | 189 | +30 / -20 | N/A | 3 |

Note: Please ask for different sizes

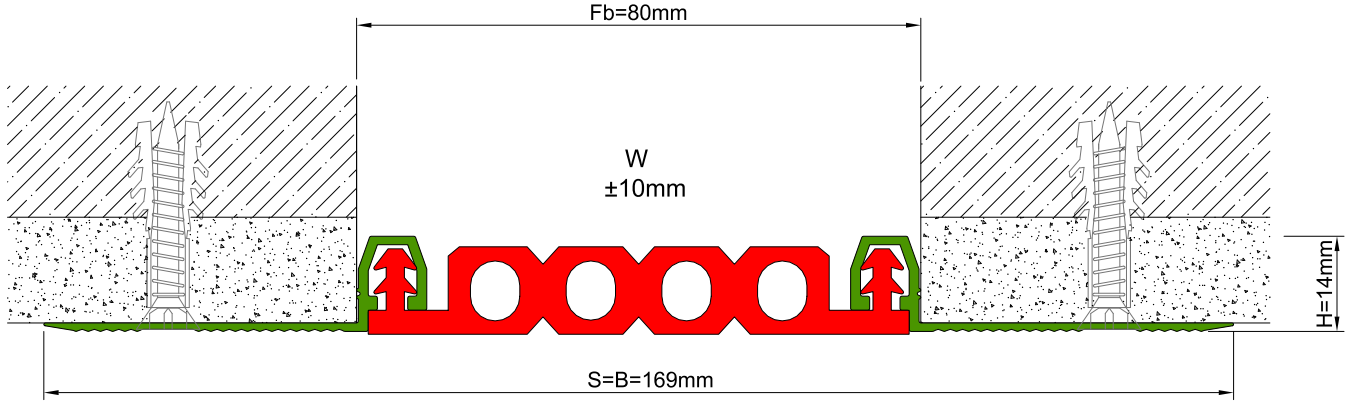

AS U122 080 H15V

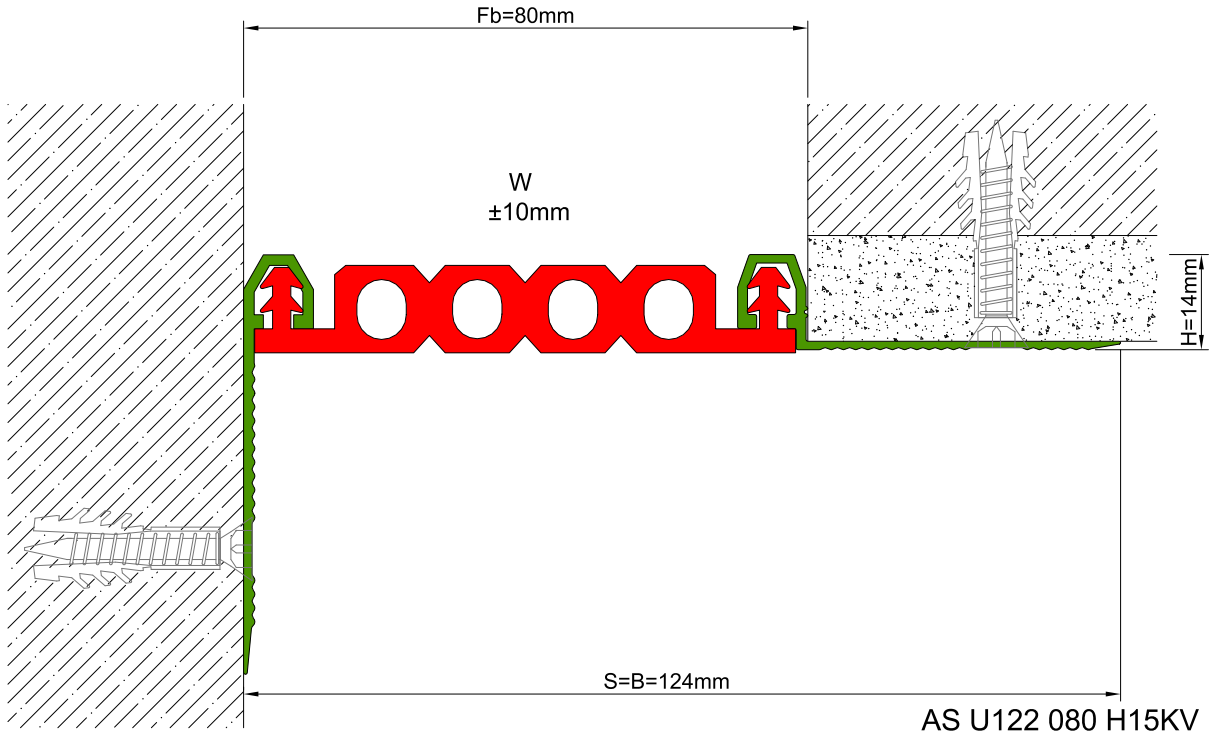

AS U122 080 H15KV

| Profil No Profile Number | AS U122 080 | AS U122 080K |
|-------------------------------------|---|--------------|
| Fb (mm) | 80 | 80 |
| H (mm) yaklaşık approx. | 15 | 15 |
| W± (mm) yaklaşık approx. | ±10 | ±10 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, EPDM Kauçuk(siyah), Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber(black), Thermoplastic Rubber (grey and others) | |
| Standart Uzunluk Standard Length | 3 | |