



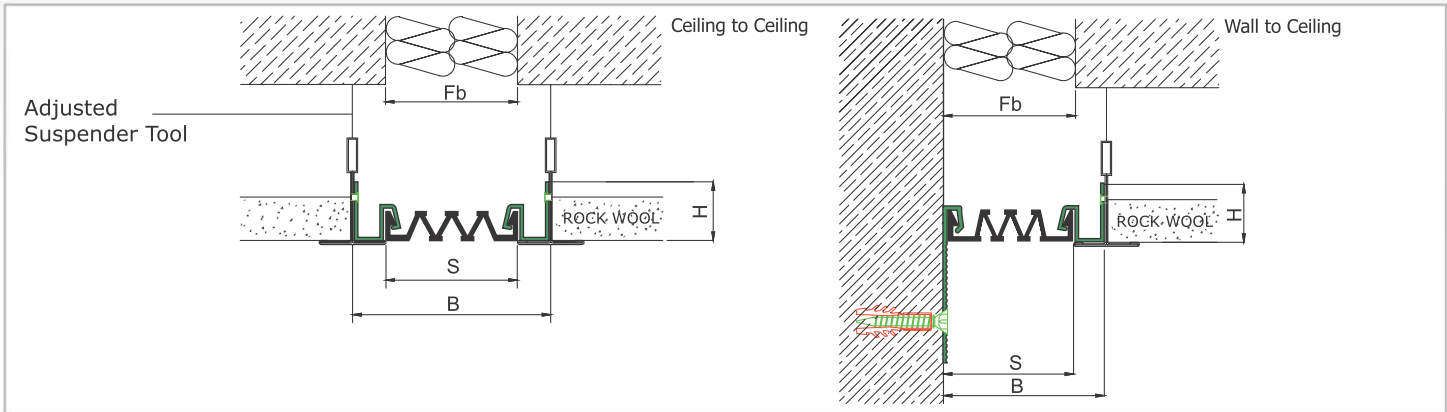

AS U123 surface mounted profile is designed for modular suspended ceiling applications at indoor areas. Profile frame is placed on the suspended ceiling T-profile and can easily be installed there by means of screws. Ribbed elastomeric gasket gains the profile high movement ability. For wall applications, it can be aligned with AS A116, AS U120 or AS U121 models.

- Application Areas** : Indoor / Modular Suspended Ceilings
- Ideal for** : Shopping Malls, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier

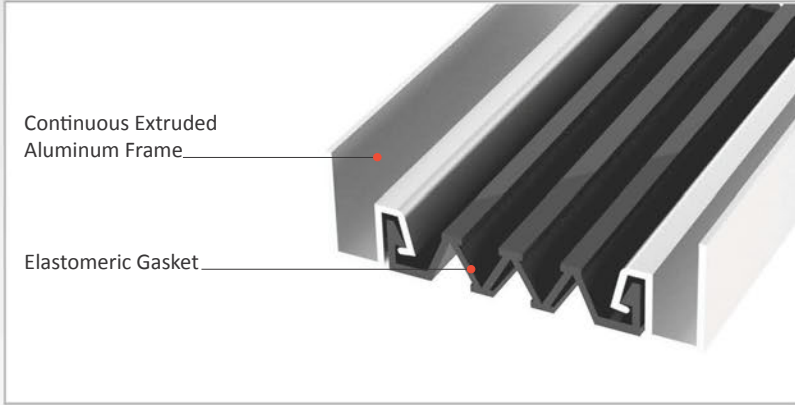



\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS    **BLACK**    GREY    BEIGE    Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Ceiling to Ceiling	AS U123-030	30	22	54	30	+10 / -6	N/A	3
	AS U123-050	50	22	74	50	+20 / -15	N/A	3
	AS U123-080	80	22	104	80	+40 / -30	N/A	3
	AS U123-100	100	22	124	100	+20 / -50	N/A	3
	AS U123-150	150	22	174	150	+30 / -80	N/A	3

Note: Please ask for different sizes



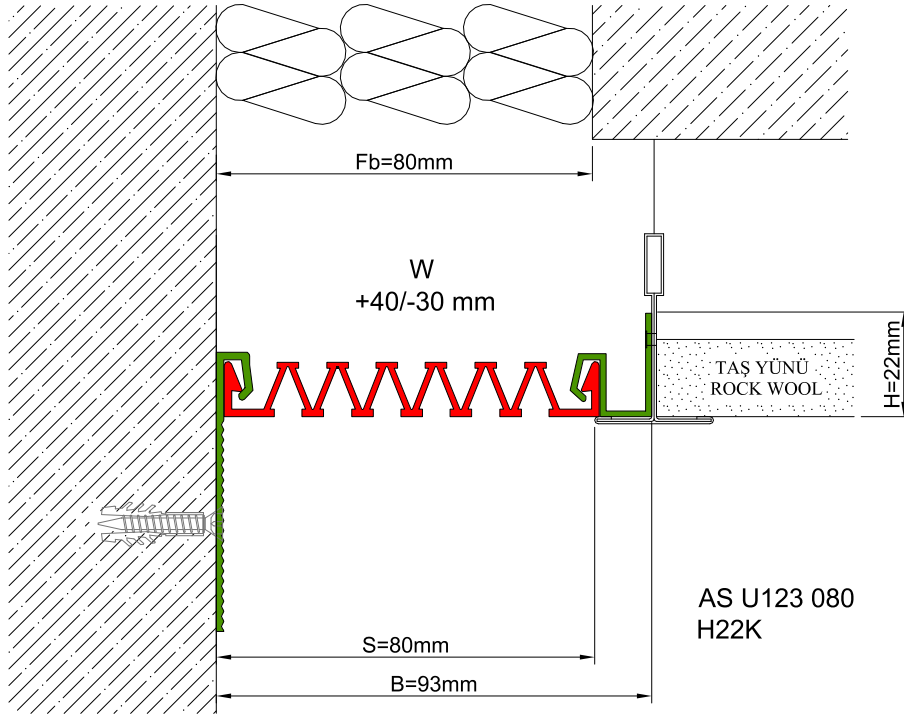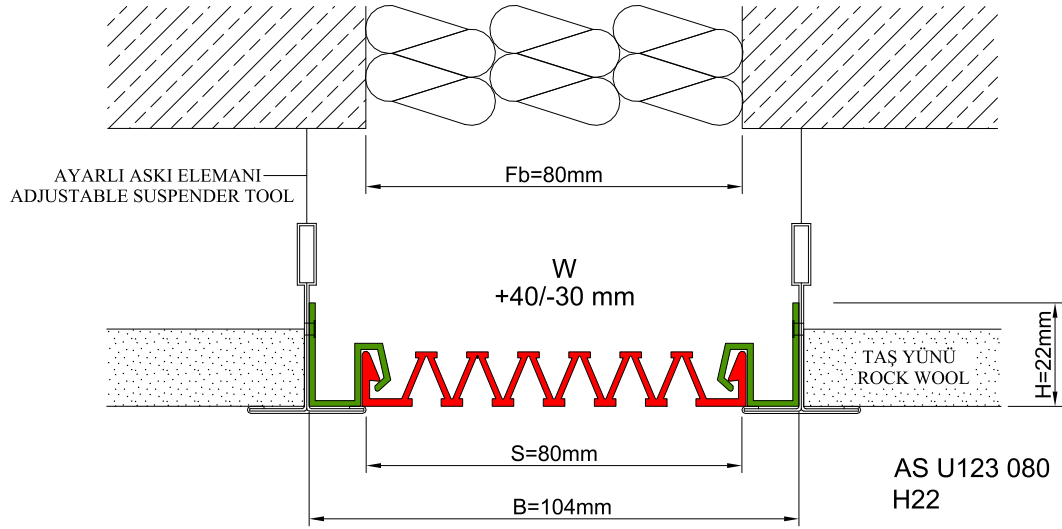

Profil No Profile Number	AS U123 080	AS U123 80K
Fb (mm)	80	80
H (mm) yaklaşık approx.	22	22
W± (mm) yaklaşık approx.	+40/-30	+40/-30
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, EPDM Kauçuk(siyah), Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber(black), Thermoplastic Rubber (grey and others)	
Standart Uzunluk Standard Length	3	