



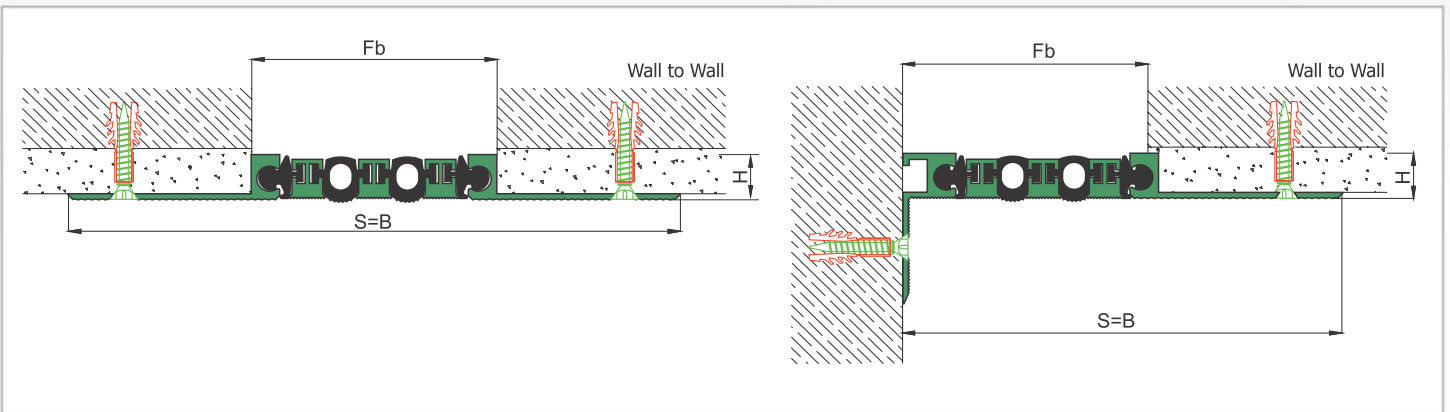

AS U136 can be considered as surface mounted type of AS A126 and can easily be installed by means of screws to all types of wall & ceiling. Adjustable interlocking profile and gasket configuration makes it available for gaps up to 200 mm. Multipartite design ensures the profile to meet displacements in 3 directions. If inquired, AS U136 can be applied with floor type AS U236 and this dual application brings in a decorative aspect. Profiles are delivered factory-assembled.

- Application Areas** : Indoor & Outdoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane


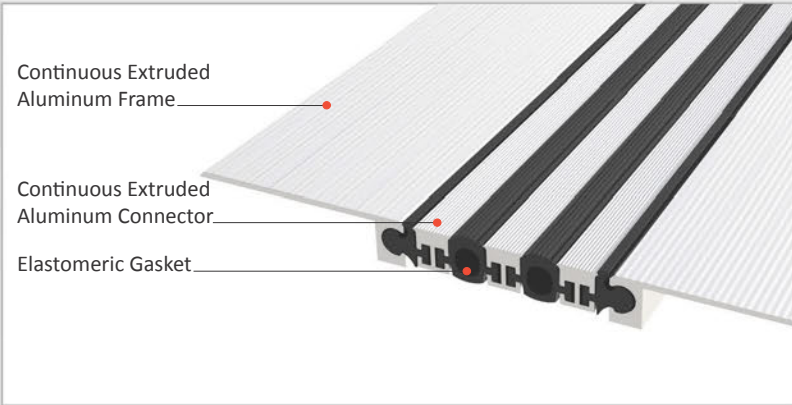


\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS    **BLACK**    GREY    BEIGE    Custom Colors available.

| LOCATION     | MODEL       | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Wall to Wall | AS U136-035 | 35          | 15            | 155                  | 155                  | ± 2             | N/A           | 3                    |
|              | AS U136-060 | 60          | 15            | 180                  | 180                  | ± 4             | N/A           | 3                    |
|              | AS U136-080 | 80          | 15            | 200                  | 200                  | ± 6             | N/A           | 3                    |
|              | AS U136-100 | 100         | 15            | 220                  | 220                  | ± 8             | N/A           | 3                    |
|              | AS U136-120 | 120         | 15            | 240                  | 240                  | ± 10            | N/A           | 3                    |
|              | AS U136-140 | 140         | 15            | 260                  | 260                  | ± 12            | N/A           | 3                    |
|              | AS U136-160 | 160         | 15            | 280                  | 280                  | ± 14            | N/A           | 3                    |
|              | AS U136-180 | 180         | 15            | 300                  | 300                  | ± 16            | N/A           | 3                    |
|              | AS U136-200 | 200         | 15            | 320                  | 320                  | ± 18            | N/A           | 3                    |

Note: Please ask for different sizes

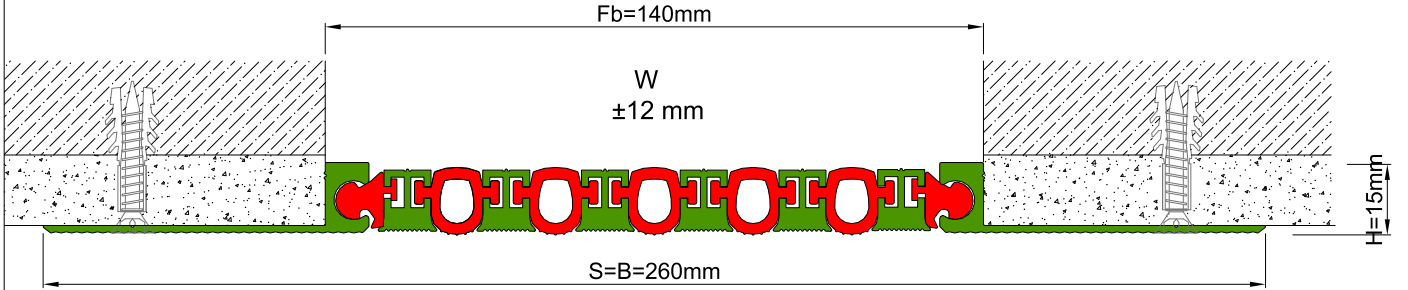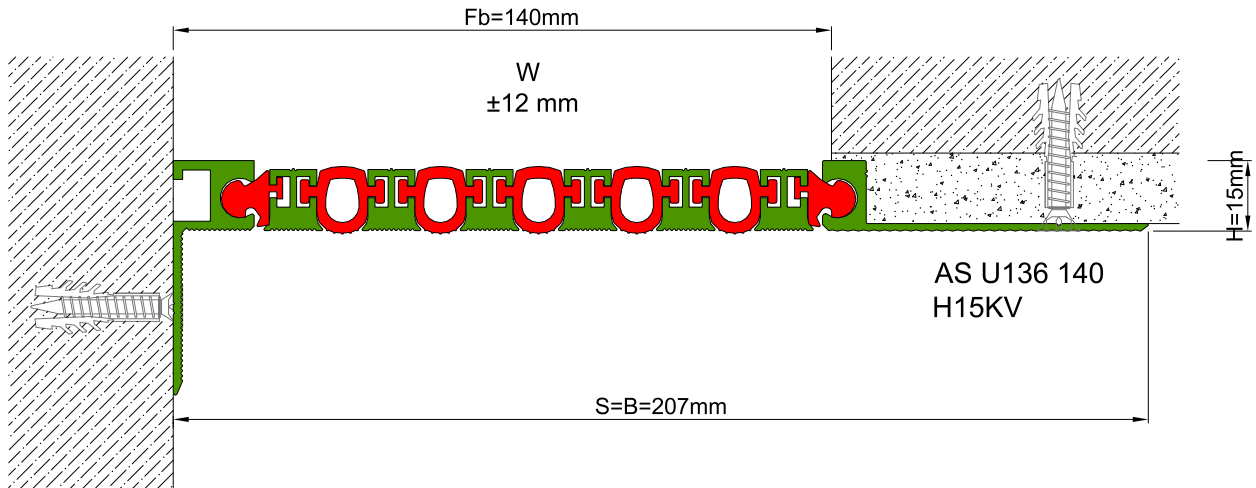
 AS U136 140  
 H15V

 AS U136 140  
 H15KV

| Profil No<br>Profile Number         | AS U136 140  | AS U136 140K |
|-------------------------------------|--|--------------|
| Fb (mm)                             | 140  | 140          |
| H (mm) yaklaşık<br>approx.          | 15   | 15           |
| W± (mm) yaklaşık<br>approx.         | ±12  | ±12          |
| Renk<br>Color                       | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer<br>Aluminum: Natural, Inserts: Black, grey, others |              |
| Malzeme<br>Material                 | Alüminyum, TPE Termoplastik Elastomer<br>Aluminum, TPE Thermoplastic Elastomer                     |              |
| Standart Uzunluk<br>Standard Length | 3  |              |