



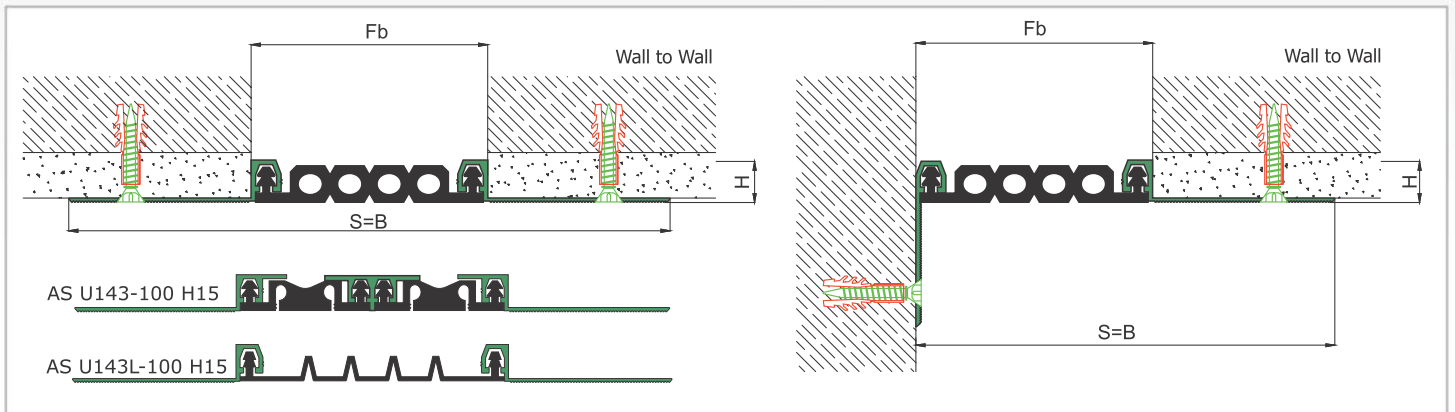

AS U143 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Push-down elastomeric gasket can be changed without demounting the profile. Smooth type gasket is available for some dimensions but with less movement capability compared to grooved type. Profile is designed quite wide compared to AS U120, AS U122 and AS AS U145 models and is ideal for the walls with damaged corners. Profiles up to 80 mm gap are manufactured with single gasket while the wider ones are with double gaskets joined with a connector profile. For some gaps, profile is able to be applied with floor type AS U243 and this dual application brings in a decorative aspect.

- Application Areas** : Indoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

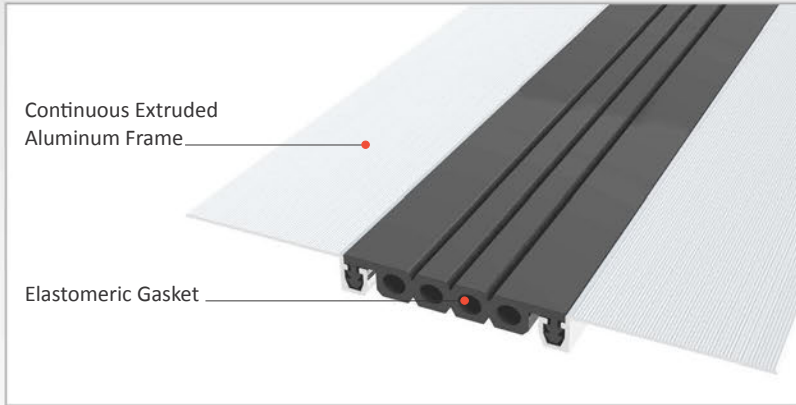



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS **BLACK** GREY **BEIGE** Custom Colors available.

| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|---------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Wall to Wall | AS U143-030 | 30 | 15 | 150 | 150 | ± 5 | N/A | 3 |
| | AS U143-050 | 50 | 15 | 170 | 170 | ± 7 | N/A | 3 |
| | AS U143-080 | 80 | 15 | 200 | 200 | ± 10 | N/A | 3 |
| | AS U143-100 | 100 | 15 | 220 | 220 | ± 14 | N/A | 3 |
| | AS U143 L-050 | 50 | 15 | 170 | 170 | +16 / -8 | N/A | 3 |
| | AS U143 L-080 | 80 | 15 | 200 | 200 | ± 20 | N/A | 3 |
| | AS U143 L-100 | 100 | 15 | 220 | 220 | +30 / -20 | N/A | 3 |

Note: Please ask for different sizes

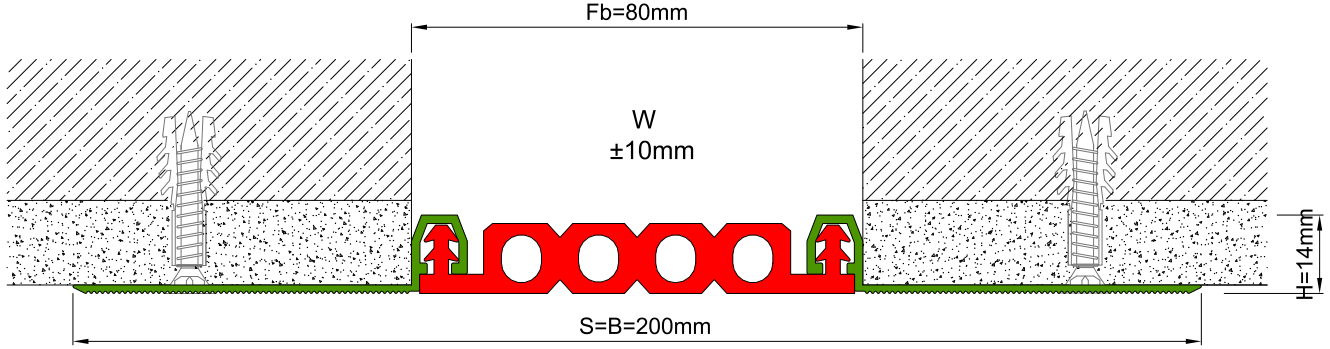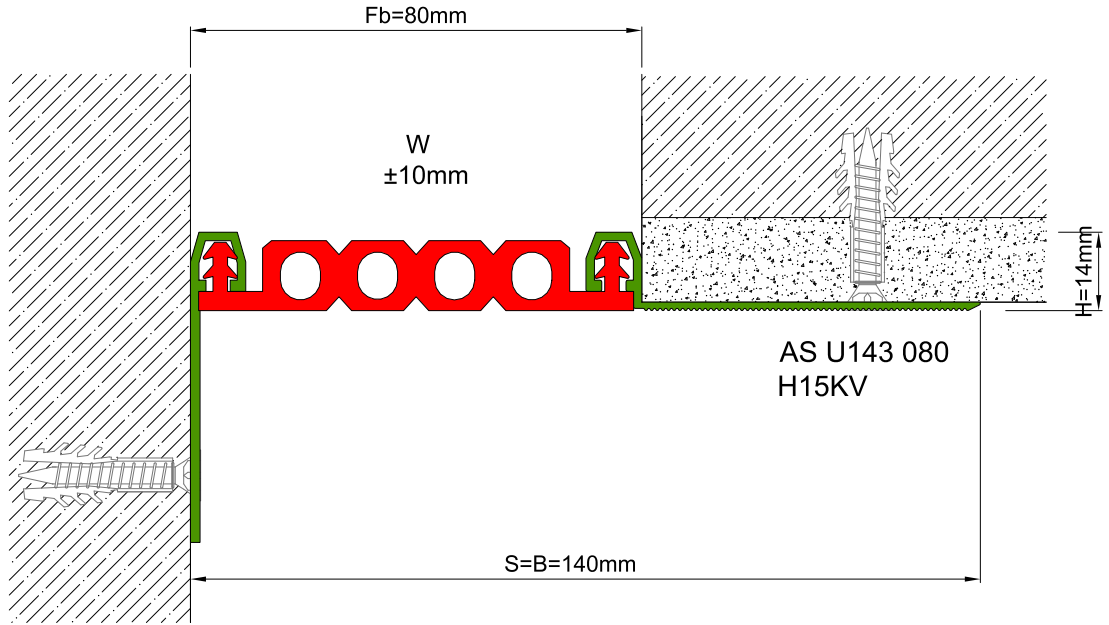


 AS U143 080
 H15V

 AS U143 080
 H15KV

| Profil No Profile Number | AS U143 080 | AS U143 080 K |
|-------------------------------------|--|---------------|
| Fb (mm) | 80 | 80 |
| H (mm) yaklaşık approx. | 15 | 15 |
| W± (mm) yaklaşık approx. | ±10 | ±10 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, TPE Termoplastik Elastomer Aluminum, TPE Thermoplastic Elastomer | |
| Standart Uzunluk Standard Length | 3 | |