

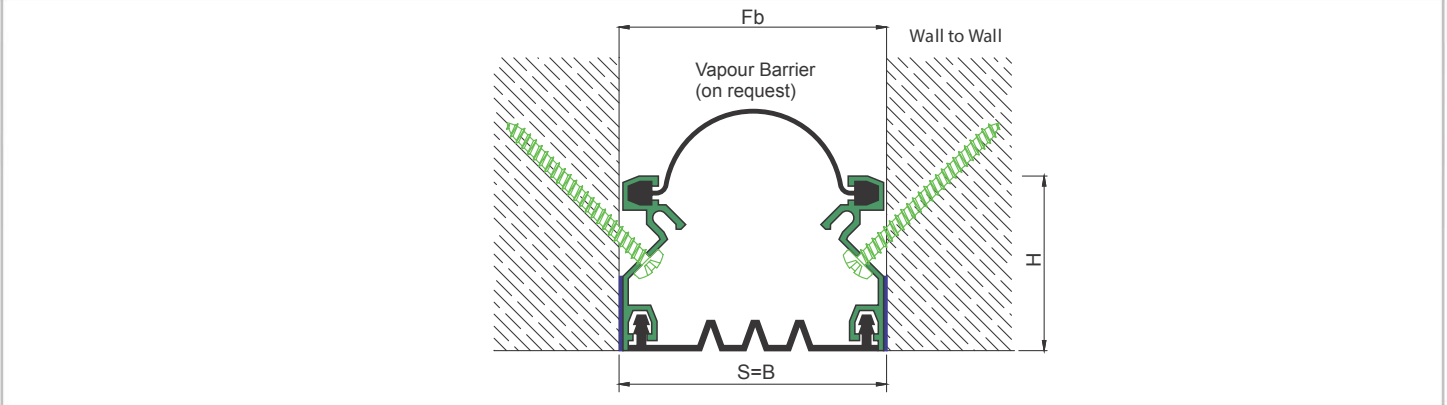


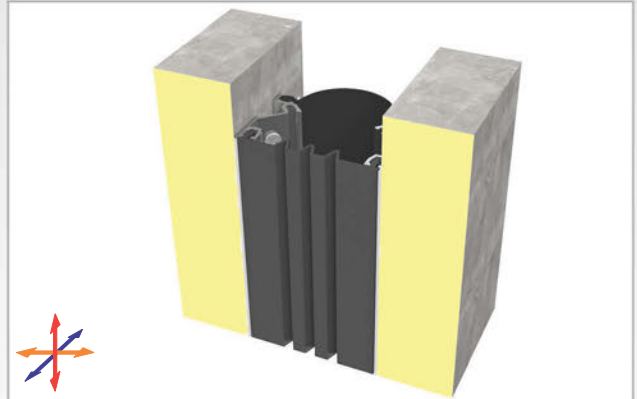

WALL & CEILING

AS U147 can be applied to all types of walls and particularly designed for applications where minimum aluminum view and invisible screwing is inquired. Flush mounted frame design complies with most of the finishes. Interchangeable Push-down elastomeric gasket gains the profile a remarkable movement ability and can be changed without demounting the profile. Profiles up to 100 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a invisible connector profile.

- Application Areas** : Indoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

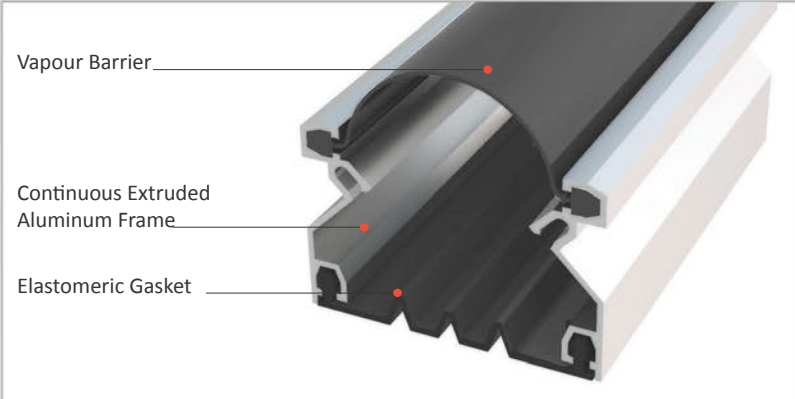


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

COLOR **BLACK**

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U147-050	50	52	50	50	+16 / -8	N/A	3
	AS U147-080	80	52	80	80	± 20	N/A	3
	AS U147-100	100	52	100	100	+30 / -20	N/A	3
	AS U147-150	150	52	150	150	+40 / -30	N/A	3
	AS U147-200	200	52	200	200	+60 / -40	N/A	3

Note: Please ask for different sizes



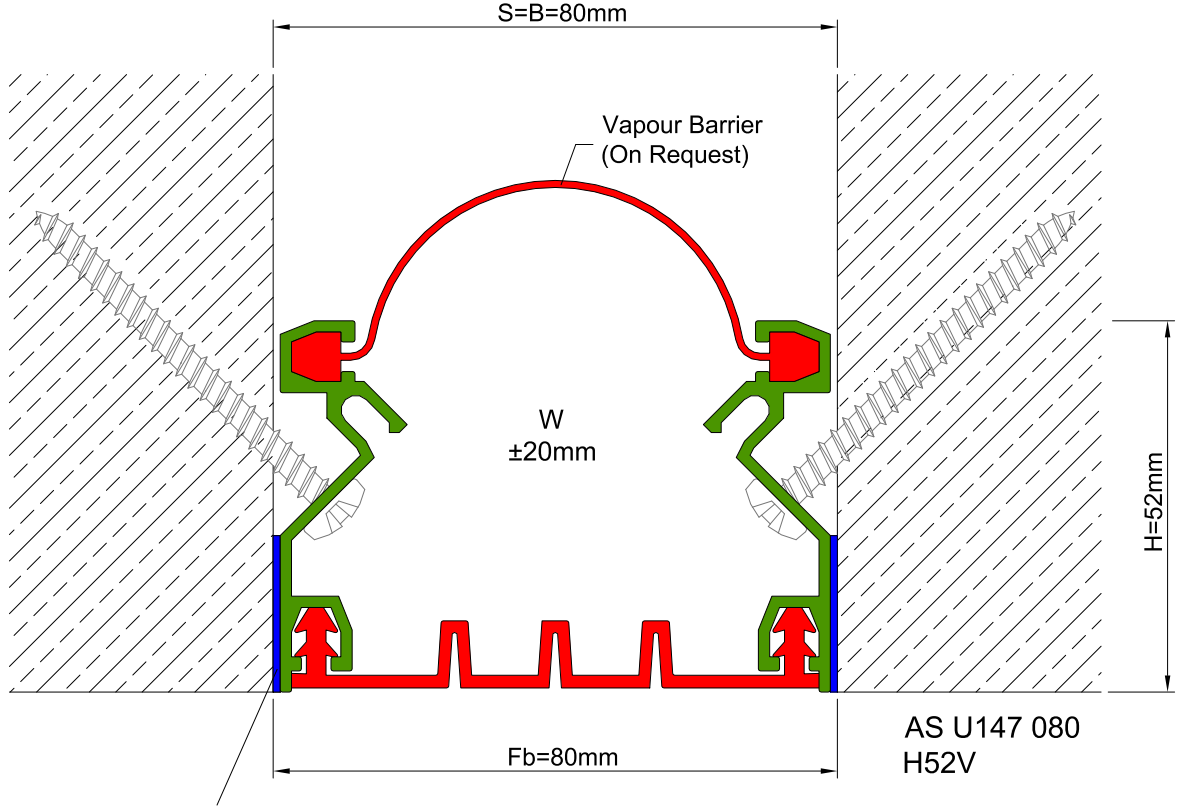

Butil Bant (istek üzerine)
Butyl Tape (on request)

Profil No Profile Number	AS U147 080	
Fb (mm)	80	
H (mm)	yaklaşık approx.	52
W± (mm)	yaklaşık approx.	±20
Renk Color	Alüminyum: Natürel, Fitiller: Siyah Aluminum: Natural, Inserts: Black	
Malzeme Material	Alüminyum, EPDM Kauçuk(siyah) Aluminum, EPDM Rubber(black)	
Standart Uzunluk Standard Length	3	