



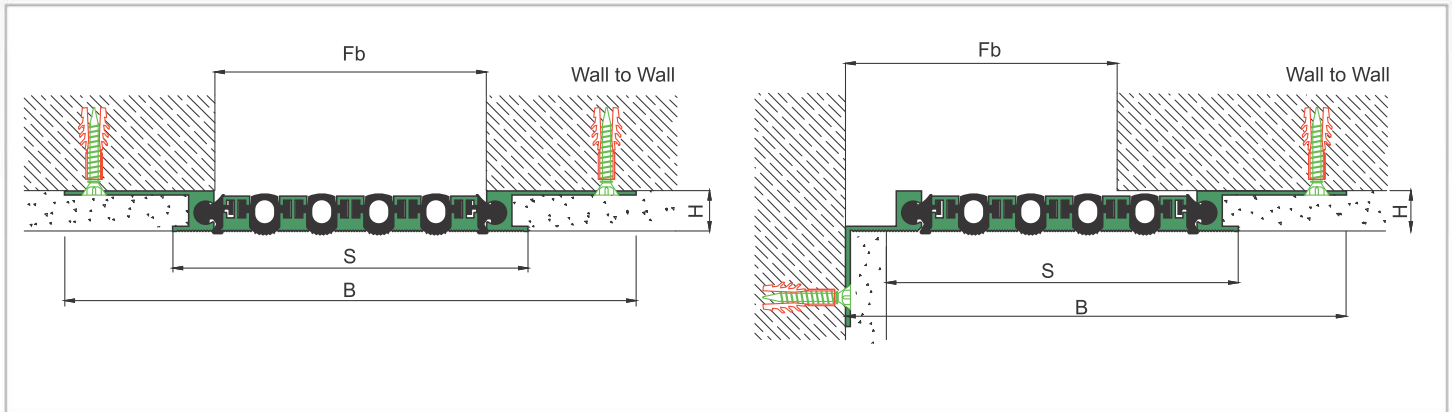

AS A126 flush mounted profile can easily be installed by means of screws to all types of wall & ceiling. Adjustable interlocking profile and gasket configuration makes it available for gaps up to 200 mm. Multipartite design ensures the profile to meet displacements in 3 directions. If inquired, AS A126 can be applied with floor type AS A226 and this dual application brings in a decorative aspect. Profiles are delivered factory-assembled.

- Application Areas** : Indoor & Outdoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane


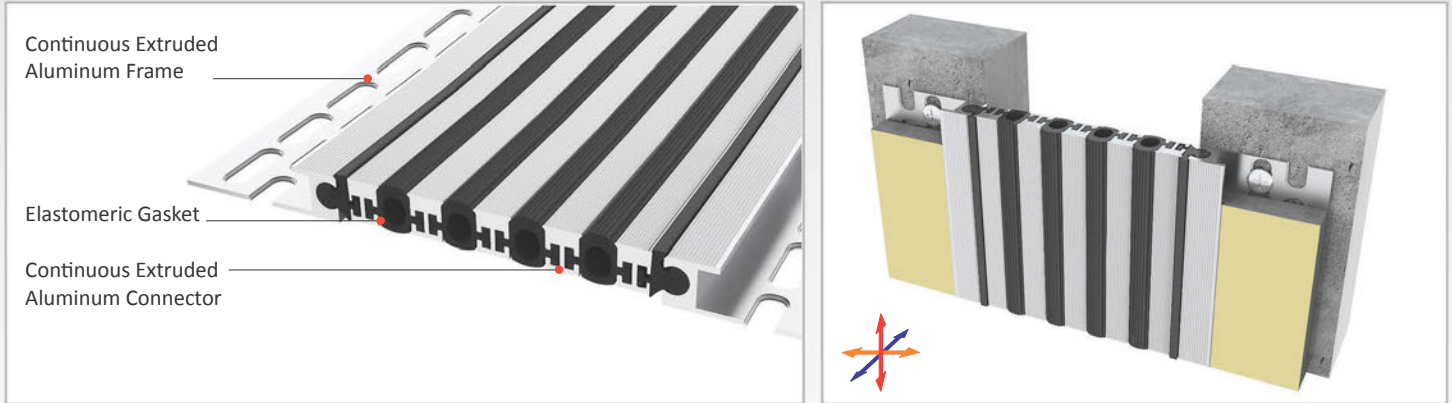


\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS: BLACK GREY BEIGE Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS A126-030	30	15 / 28	128	48	± 2	N/A	3
	AS A126-050	50	15 / 28	148	68	± 4	N/A	3
	AS A126-060	60	15 / 28	170	90	± 6	N/A	3
	AS A126-080	80	15 / 28	190	110	± 8	N/A	3
	AS A126-100	100	15 / 28	210	131	± 10	N/A	3
	AS A126-120	120	15 / 28	231	152	± 12	N/A	3
	AS A126-140	140	15 / 28	252	173	± 14	N/A	3
	AS A126-160	160	15 / 28	273	193	± 16	N/A	3
	AS A126-200	200	15 / 28	315	235	± 20	N/A	3

Note: Please ask for different sizes

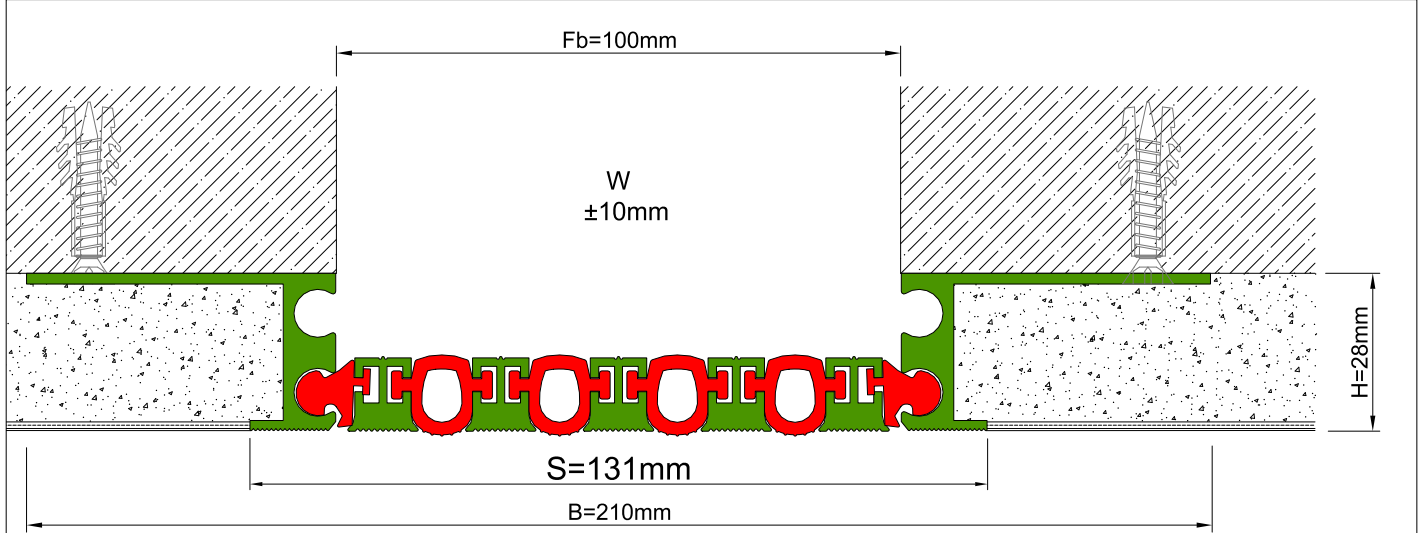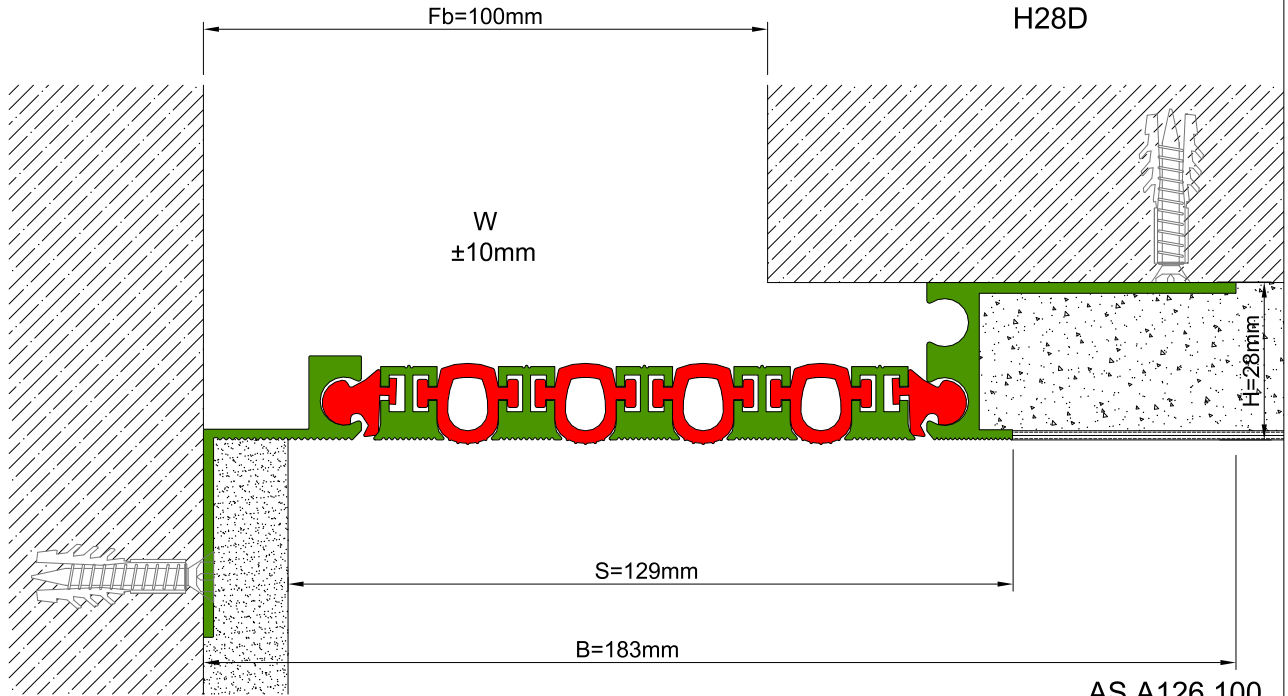
 AS A126 100  
 H28D

 AS A126 100  
 H28KD

Profil No Profile Number	AS A126 100	AS A126 100K
Fb (mm)	100	100
H (mm) yaklaşık approx.	28	28
W± (mm) yaklaşık approx.	±10	±10
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, TPE Termoplastik Elastomer Aluminum, TPE Thermoplastic Elastomer	
Standart Uzunluk Standard Length	3	