









AS U205 surface mounted profile is applicable to all types of floors and load bearing capacity is designed for cars. Push-down gasket can quickly be placed into the slot and changed in a very easy way, if it's needed. Special gasket design gains the profile high movement ability and prevents accumulation of dirt. Two-way designed gasket slot lets the profile to applied surface or flush mounted. Profiles are applied with single or double gaskets depending on the joint width. Striated surface ensures antislip.

Application Areas : Indoor & Outdoor / Floor

Ideal for : Car Parks, Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings


Material : Mill Finish Aluminum (Anodizing optional), PVC Gasket

Aluminum Alloy : 6063 AA-USA / EN AW 6063

Optional Supplies : Fire Barrier, Waterproof EPDM membrane





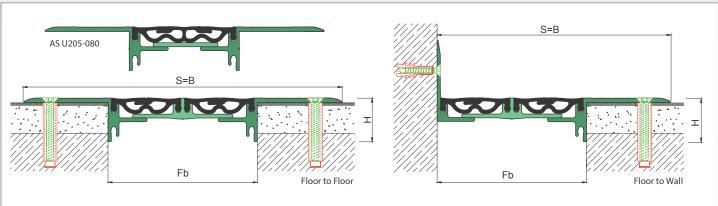

^{*} Visuals are representative and the profile configuration may differ depending on the characteristics requested.


GASKET COLORS BEACK GREY BEIGE Custom Colors available.								
LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
	AS U205-050	50	26	177	177	± 10		3
Floor to Floor	AS U205-080	80	32	203	203	± 15		3
	AS U205-100	100	32	230	230	+12 / -20		3

Note: Please ask for different sizes





Zemin Profilleri Floor Profiles AS U205 050 H26V

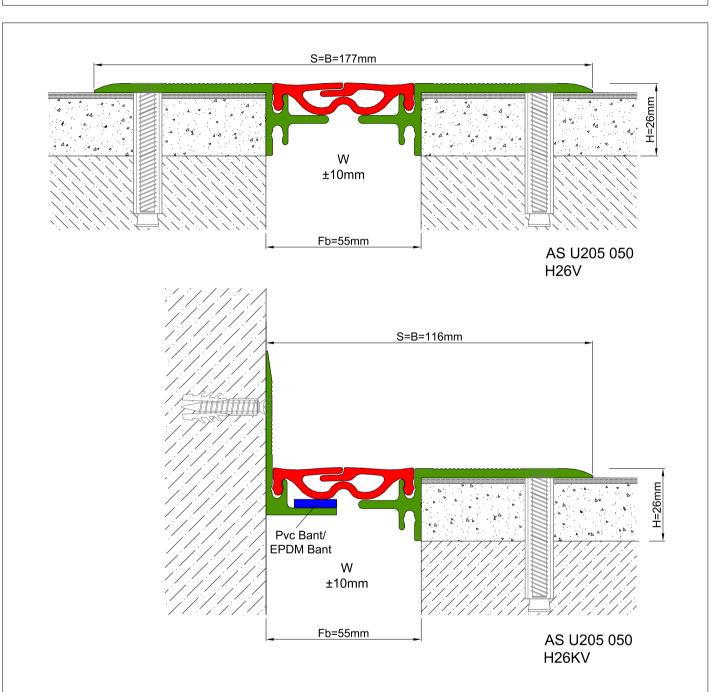

Profil No Profile Number	AS U205 050	AS U205 050K			
Fb (mm)	55	55			
H (mm) yaklaşık approx.	26	26			
W± (mm) yaklaşık approx.	±10	±10			
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri,diğer Aluminum: Natural,Inserts:Black,grey,others				
Malzeme Material	Alüminyum, PVC (gri ve diğer) Aluminum, PVC (grey and others)				
Standart Uzunluk Standard Length	3				
Yükleme Kapasitesi Load - Bearing Capacity					