



AS U205 surface mounted profile is applicable to all types of floors and load bearing capacity is designed for cars. Push-down gasket can quickly be placed into the slot and changed in a very easy way, if it's needed. Special gasket design gains the profile high movement ability and prevents accumulation of dirt. Two-way designed gasket slot lets the profile to applied surface or flush mounted. Profiles are applied with single or double gaskets depending on the joint width. Striated surface ensures antislip.

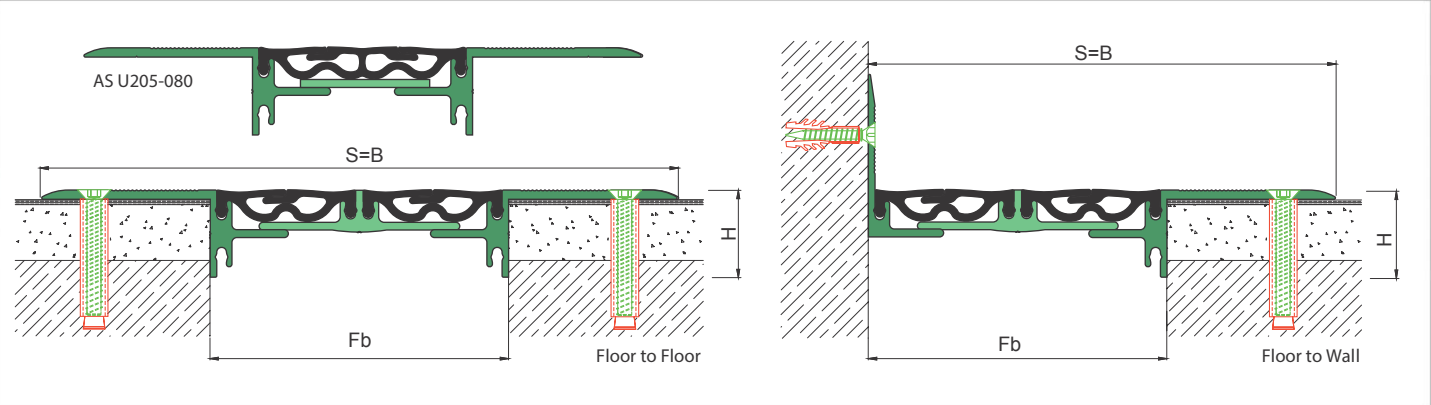


- Application Areas** : Indoor & Outdoor / Floor
Ideal for : Car Parks, Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings
Material : Mill Finish Aluminum (Anodizing optional), PVC Gasket
Aluminum Alloy : 6063 AA-USA / EN AW 6063
Optional Supplies : Fire Barrier, Waterproof EPDM membrane

FLOOR

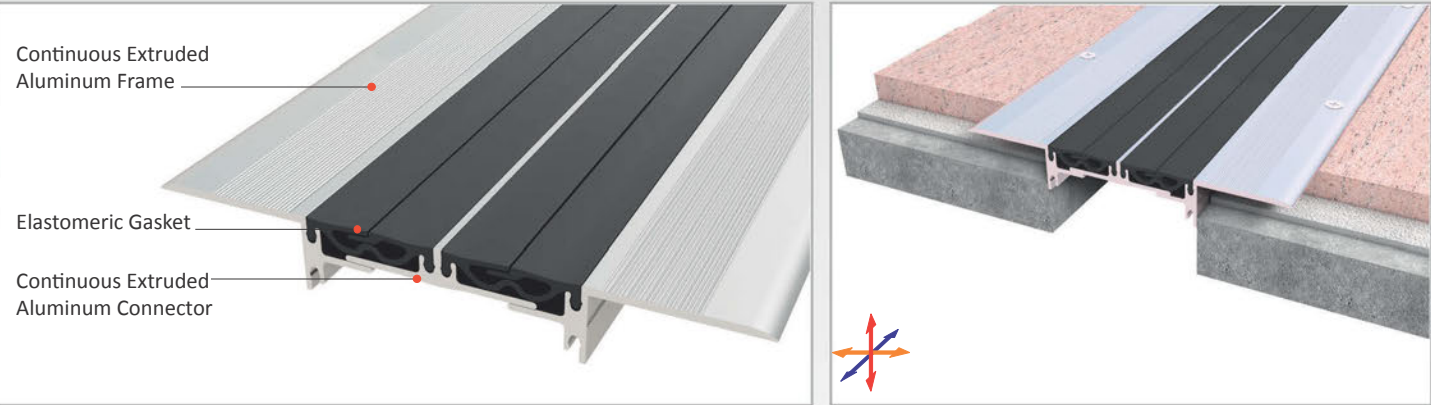



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS **BLACK** GREY BEIGE Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS U205-050	50	26	177	177	± 10		3
	AS U205-080	80	32	203	203	± 15		3
	AS U205-100	100	32	230	230	+12 / -20		3

Note: Please ask for different sizes

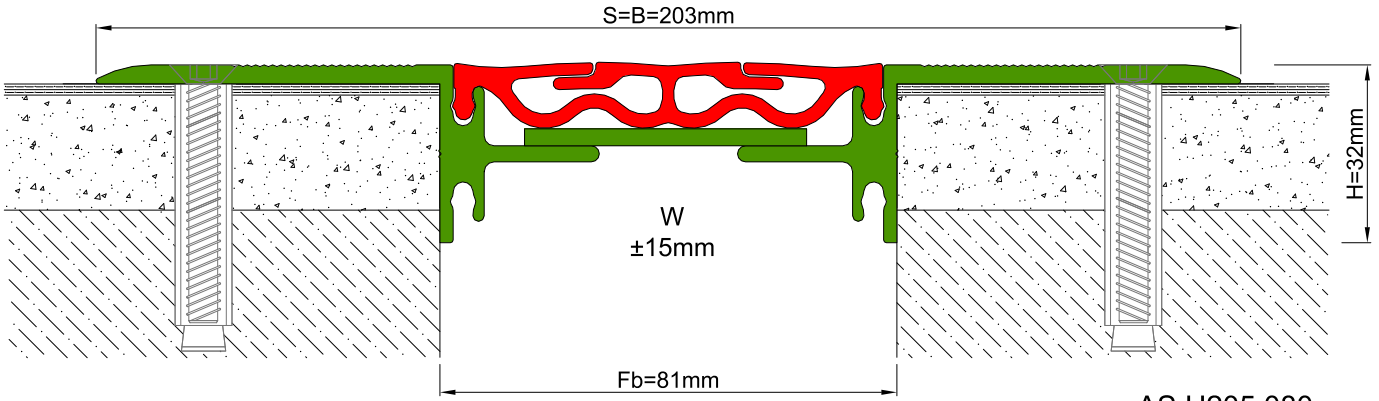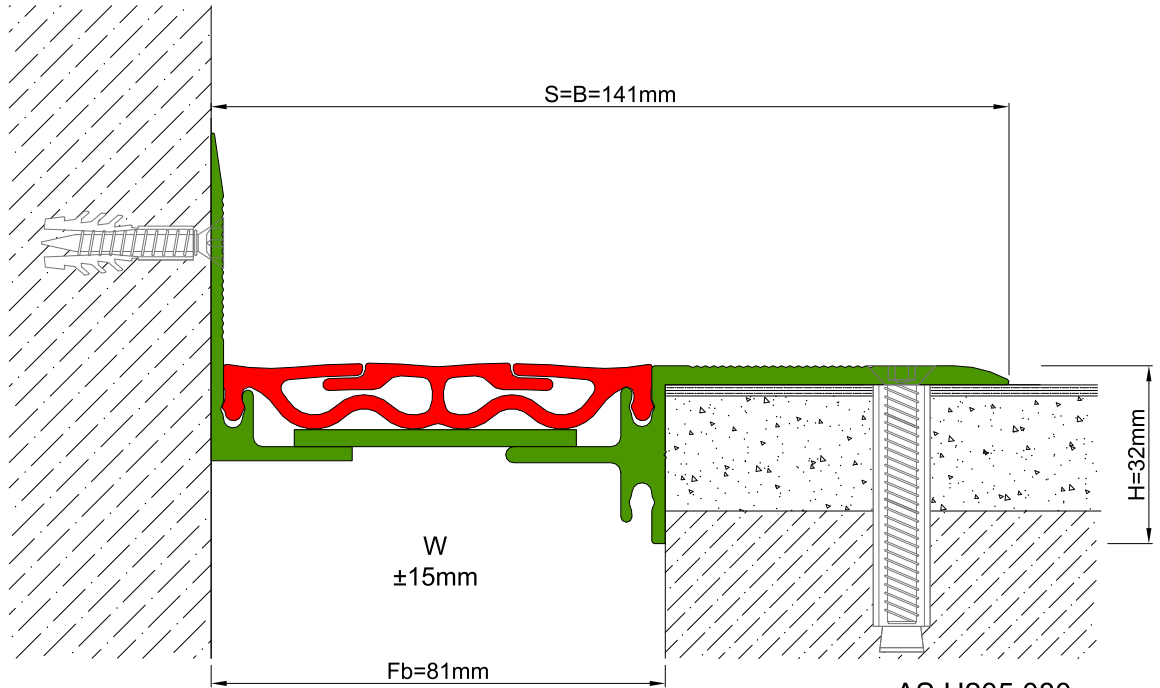


 AS U205 080
 H32V

 AS U205 080
 H32KV

Profil No Profile Number	AS U205 080	AS U205 080K
Fb (mm)	81	81
H (mm)	yaklaşık approx.	32
W± (mm)	yaklaşık approx.	±15
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, PVC (gri ve diğer) Aluminum, PVC (grey and others)	
Standart Uzunluk Standard Length	3	
Yükleme Kapasitesi Load - Bearing Capacity	