



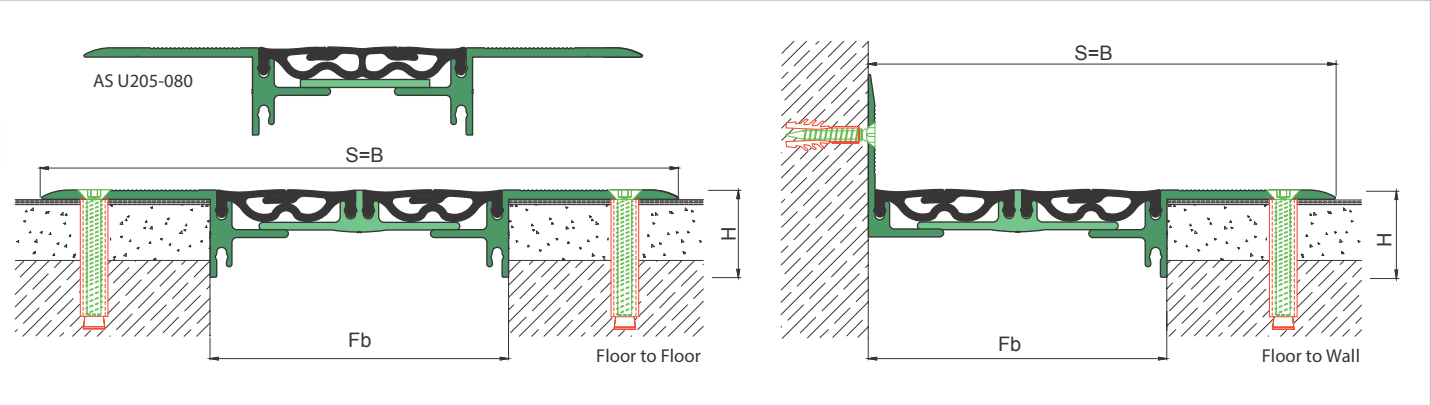

AS U205 surface mounted profile is applicable to all types of floors and load bearing capacity is designed for cars. Push-down gasket can quickly be placed into the slot and changed in a very easy way, if it's needed. Special gasket design gains the profile high movement ability and prevents accumulation of dirt. Two-way designed gasket slot lets the profile to applied surface or flush mounted. Profiles are applied with single or double gaskets depending on the joint width. Striated surface ensures antislip.

- Application Areas** : Indoor & Outdoor / Floor  
**Ideal for** : Car Parks, Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings  
**Material** : Mill Finish Aluminum (Anodizing optional), PVC Gasket  
**Aluminum Alloy** : 6063 AA-USA / EN AW 6063  
**Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

FLOOR

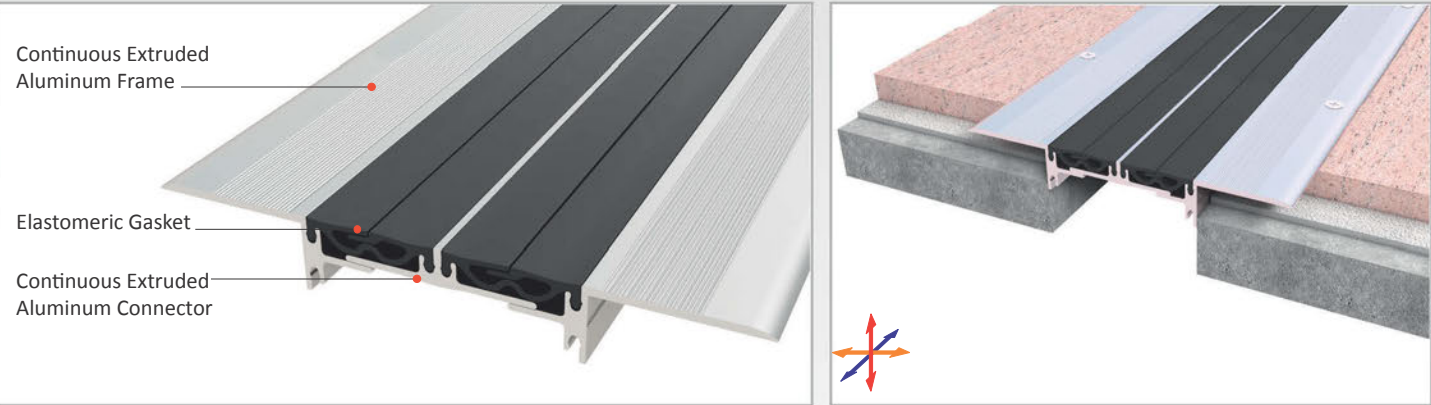


\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS: **BLACK** | GREY | BEIGE | Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS U205-050	50	26	177	177	± 10		3
	AS U205-080	80	32	203	203	± 15		3
	AS U205-100	100	32	230	230	+12 / -20		3

Note: Please ask for different sizes



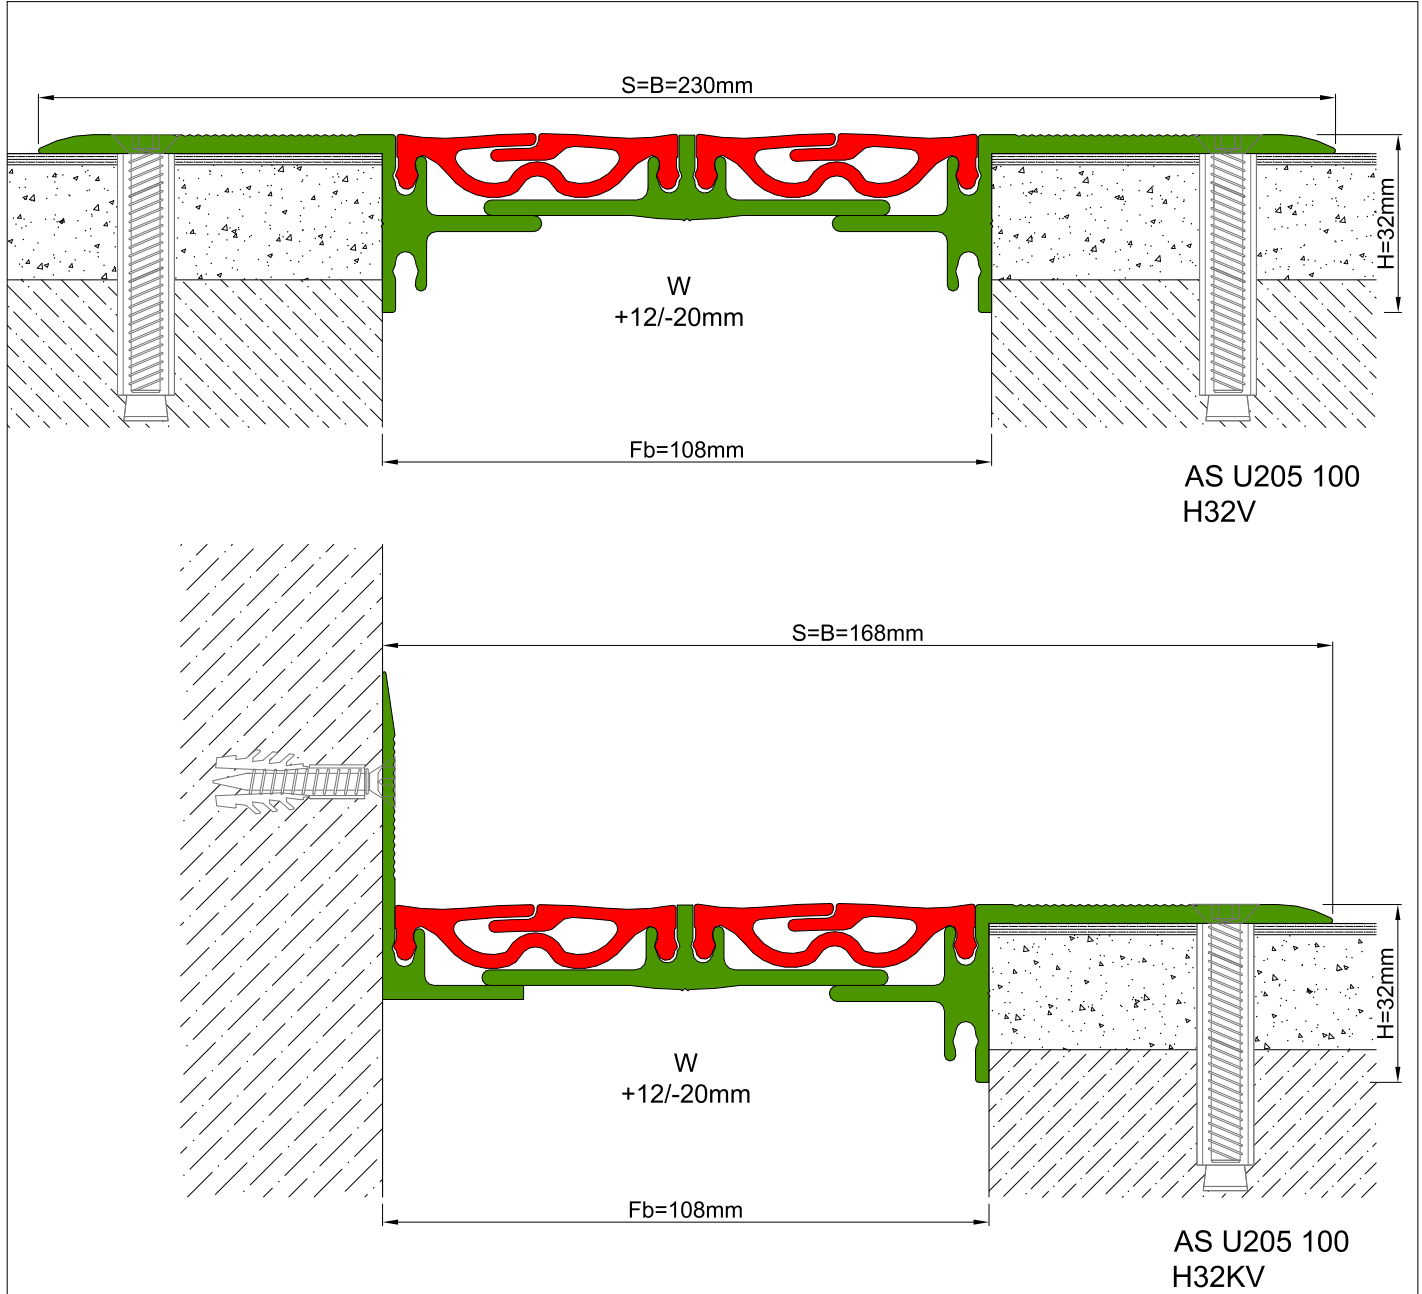

Profil No Profile Number	AS U205 100	AS U205 100K
Fb (mm)	108	108
H (mm)	yaklaşık approx.	32
W± (mm)	yaklaşık approx.	+12/-20
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, PVC (gri ve diğer) Aluminum, PVC (grey and others)	
Standart Uzunluk Standard Length	3	
Yükleme Kapasitesi Load - Bearing Capacity	