



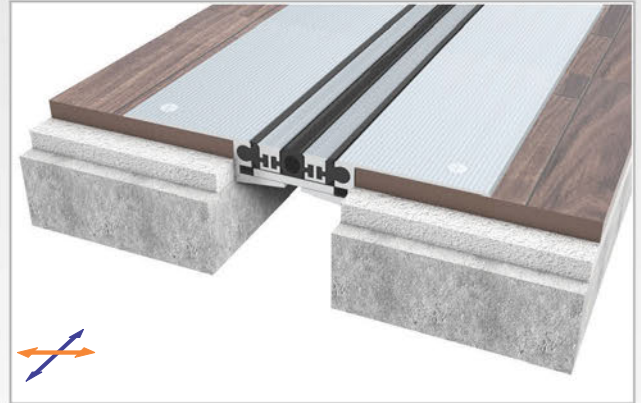


AS U236 surface mounted floor profiles are designed for pedestrian and can easily be applied to all types of floors. Adjustable interlocking profile and gasket configuration makes it available for gaps up to 200 mm and enables to meet horizontal & lateral shear movements. Profiles at H:28 & H:35 mm are manufactured heavy duty. If inquired, AS U236 can be applied with wall type AS U136 and this dual application brings in a decorative aspect. Profiles are delivered factory-assembled.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Residences, Offices etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

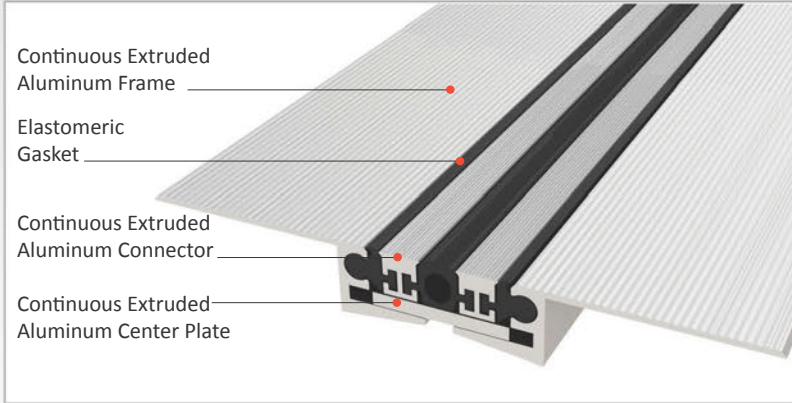

FLOOR


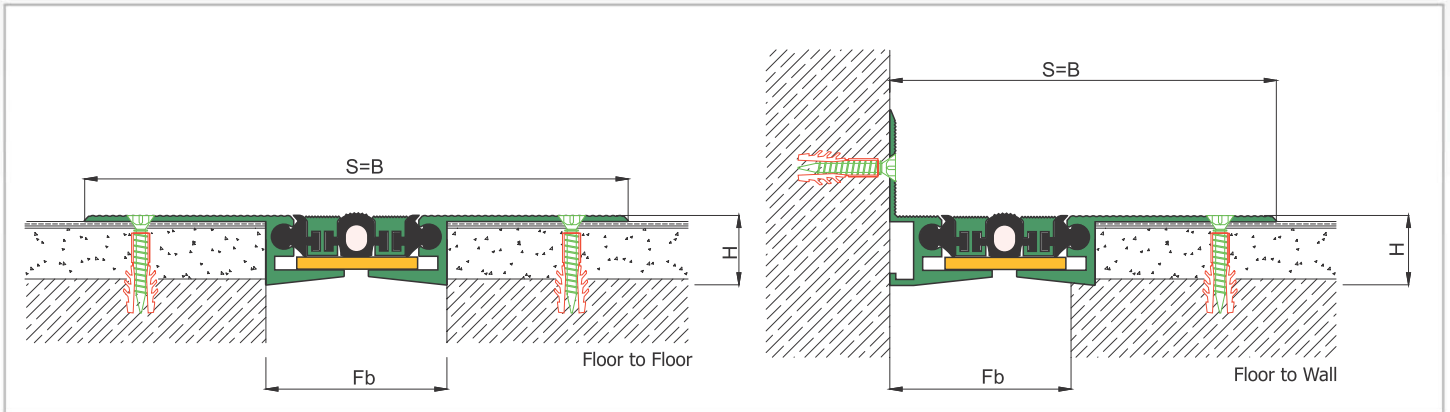



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.



| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|----------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Floor to Floor | AS U236-035 | 35 | 15 | 155 | 155 | ± 2 | | 3 |
| | AS U236-060 | 60 | 23 | 180 | 180 | ± 4 | | 3 |
| | AS U236-080 | 80 | 23 | 200 | 200 | ± 6 | | 3 |
| | AS U236-100 | 100 | 23 | 220 | 220 | ± 8 | | 3 |
| | AS U236-120 | 120 | 23 | 240 | 240 | ± 10 | | 3 |
| | AS U236-140 | 140 | 24 | 260 | 260 | ± 12 | | 3 |
| | AS U236-160 | 160 | 24 | 280 | 280 | ± 14 | | 3 |
| | AS U236-180 | 180 | 24 | 300 | 300 | ± 16 | | 3 |
| | AS U236-200 | 200 | 24 | 320 | 320 | ± 18 | | 3 |

Note: Please ask for different sizes

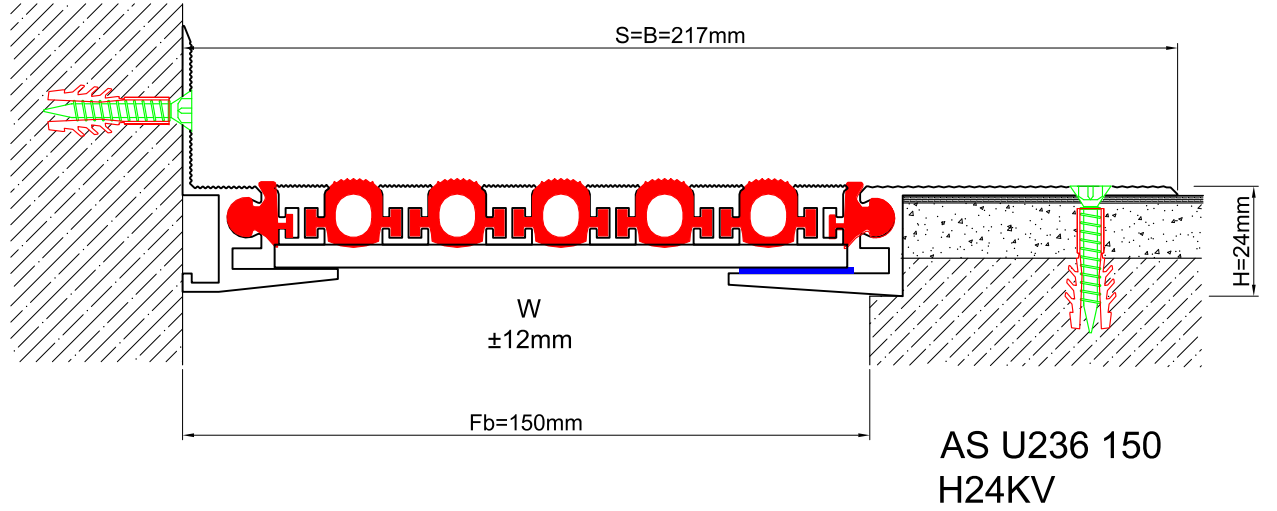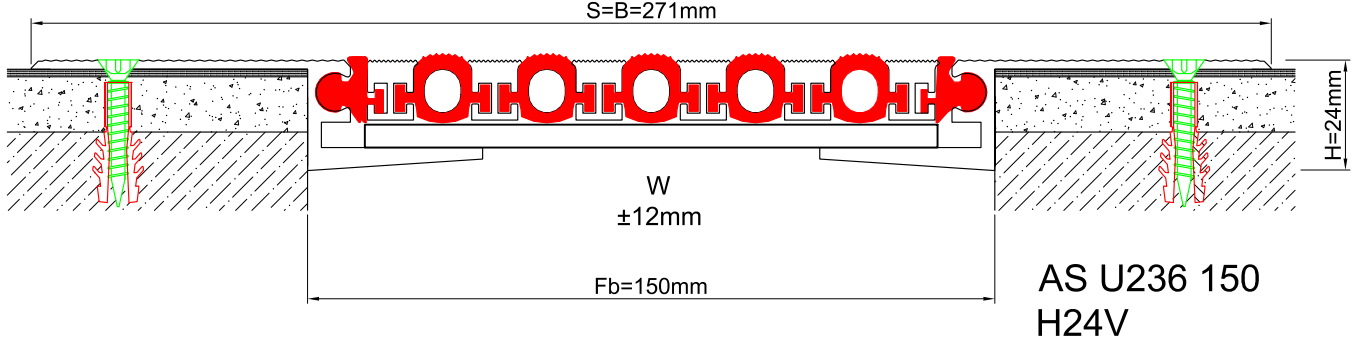

| Profil No Profile Number | AS U236 150 | AS U236 150 K |
|---|--|---------------|
| Fb (mm) | 150 | 150 |
| H (mm) yaklaşık approx. | 24 | 24 |
| W± (mm) yaklaşık approx. | ±12 | ±12 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, TPE Termoplastik Elastomer Aluminum, TPE Thermoplastic Elastomer | |
| Standart Uzunluk Standard Length | 3 | |
| Yükleme Kapasitesi Load-Bearing Capacity |  | |