

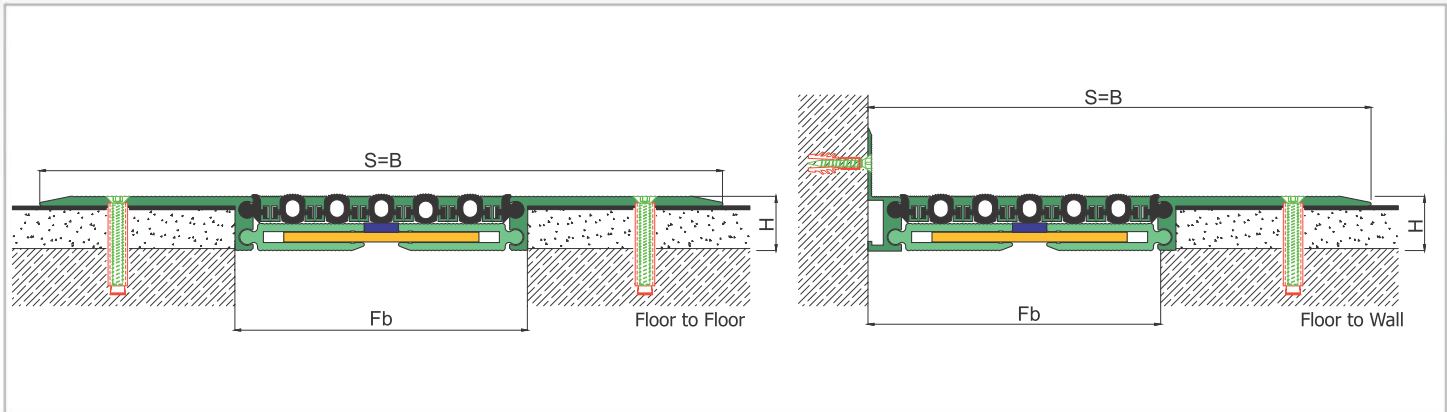


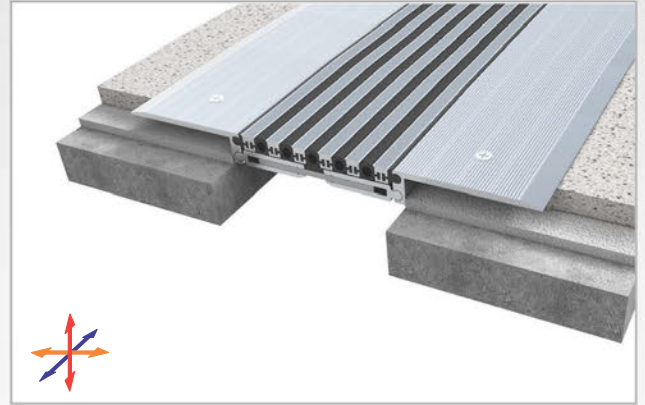


AS U240 surface mounted profile can easily be applied to all types of floors and load bearing capacity is designed for cars. Adjustable interlocking profile and gasket configuration makes it available for gaps up to 200 mm and enables to meet displacements in 3 directions. Quite wide designed frames make AS U240 ideal for wavelike joints and striated surface ensures antislip. Profiles are delivered factory assembled.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Car Parks, Airports, Shopping Malls, Hospitals, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

FLOOR

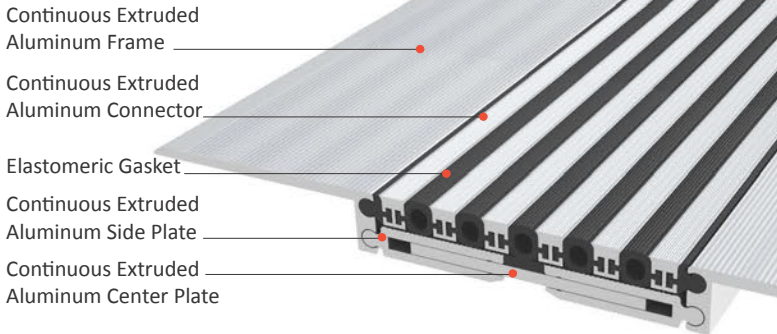



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.




| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|----------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Floor to Floor | AS U240-100 | 100 | 28 | 300 | 300 | ± 8 | | 3 |
| | AS U240-120 | 120 | 28 | 320 | 320 | ± 10 | | 3 |
| | AS U240-160 | 160 | 28 | 360 | 360 | ± 14 | | 3 |
| | AS U240-180 | 180 | 28 | 380 | 380 | ± 16 | | 3 |
| | AS U240-200 | 200 | 28 | 400 | 400 | ± 18 | | 3 |

Note: Please ask for different sizes



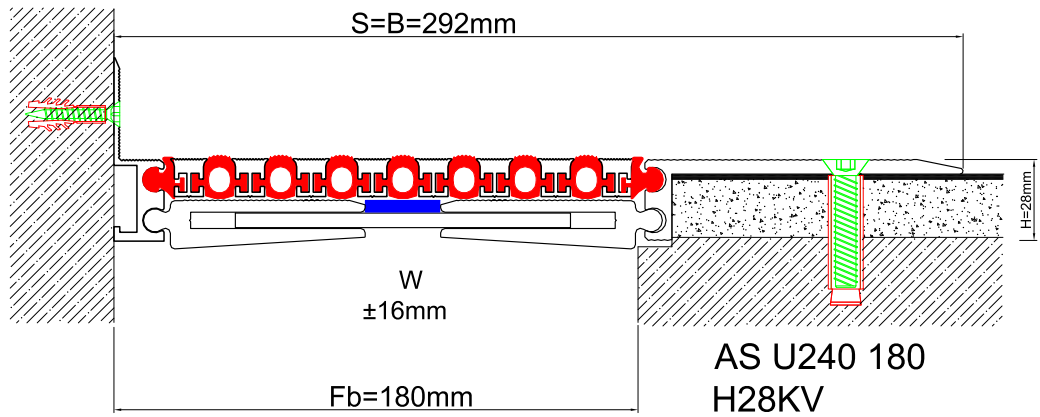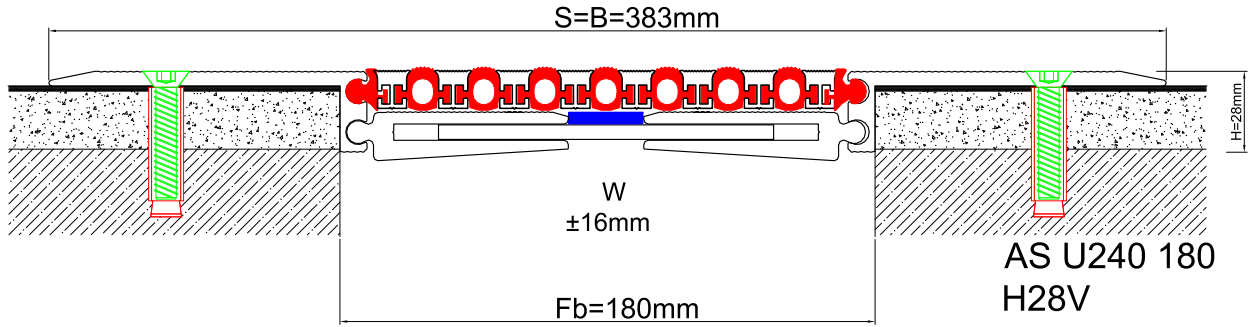

| Profil No Profile Number | AS U240 180 | AS U240 180K |
|---|---|--------------|
| Açıklık (Fb) mm Gap (Fb) mm | 180 | 180 |
| Yükseklik (H) mm yaklaşık Coating thickness (H) mm approx | 28 | 28 |
| Hareket Kapasitesi (W) mm yaklaşık Movement capacity (W) mm approx | ±16 | ±16 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminium: Natural, Inserts: Black, grey, others | |
| Standart Uzunluk (m) Standart Length (m) | 3 | |
| Yükleme Kapasitesi Load-bearing Capacity | 40 kN  | |