
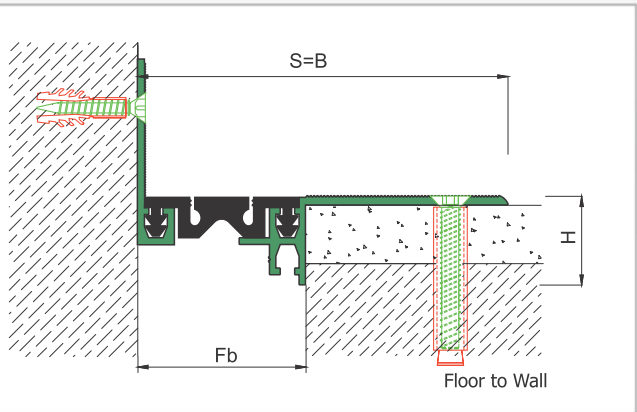
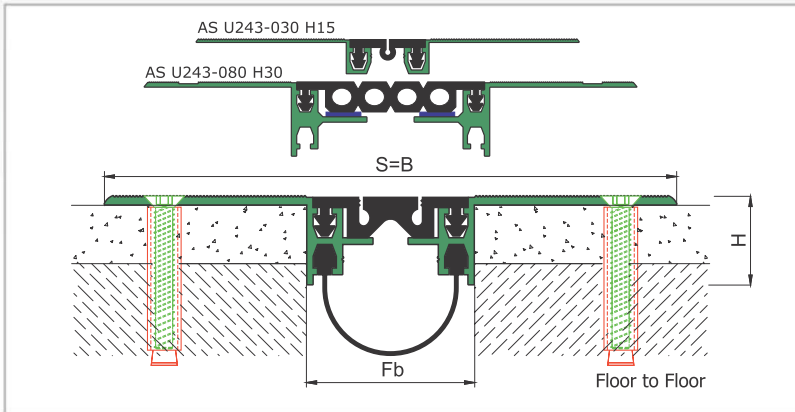


AS U243 surface mounted floor profile is applicable to all types of floors and load bearing capacity is designed for pedestrians or cars depending on the gap inquired. Push-down elastomeric gasket can quickly be placed into the slot and changed without demounting the profile. Smooth type gasket is available for 30 & 50 mm gaps but with less movement capability compared to grooved type. Two-way designed gasket slot lets the profile to be applied surface or flush mounted for some gaps. Striated surface ensures antislip.

- Application Areas** : Indoor & Outdoor / Floor
Ideal for : Car Parks, Shopping Malls, Airports, Residences, Hospitals, Commercial & Public Buildings etc.
Material : Mill Finish Aluminum (Anodizing optional), TPE Gasket
Aluminum Alloy : 6063 AA-USA / EN AW 6063
Optional Supplies : Fire Barrier, Waterproof EPDM membrane, Vapour Barrier

FLOOR

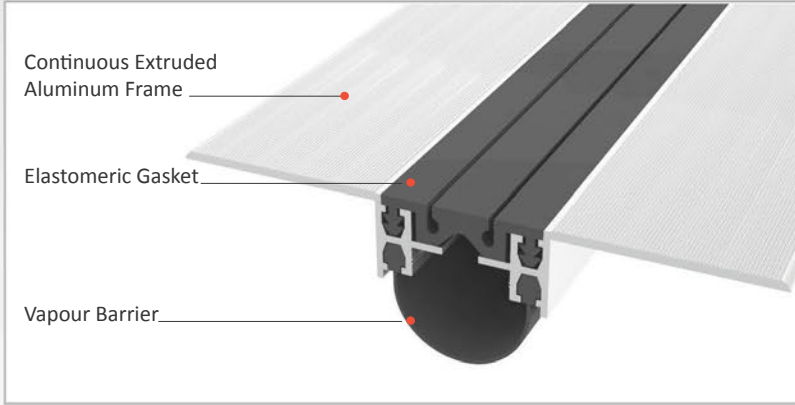



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.


GASKET COLORS **BLACK** GREY BEIGE Custom Colors available.

| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|----------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Floor to Floor | AS U243-024 | 24 | 26 | 120 | 120 | ± 4 | | 3 |
| | AS U243-030 | 30 | 15 | 150 | 150 | ± 5 | | 3 |
| | AS U243-030 | 30 | 26 | 150 | 150 | ± 5 | | 3 |
| | AS U243-050 | 50 | 15 | 170 | 170 | ± 7 | | 3 |
| | AS U243-050 | 50 | 26 | 170 | 170 | ± 7 | | 3 |
| | AS U243-050 | 50 | 27 | 170 | 170 | ± 7 | | 3 |
| | AS U243-080 | 80 | 30 | 200 | 200 | ± 10 | | 3 |
| | AS U243-100 | 100 | 30 | 226 | 226 | ± 14 | | 3 |

Note: Please ask for different sizes



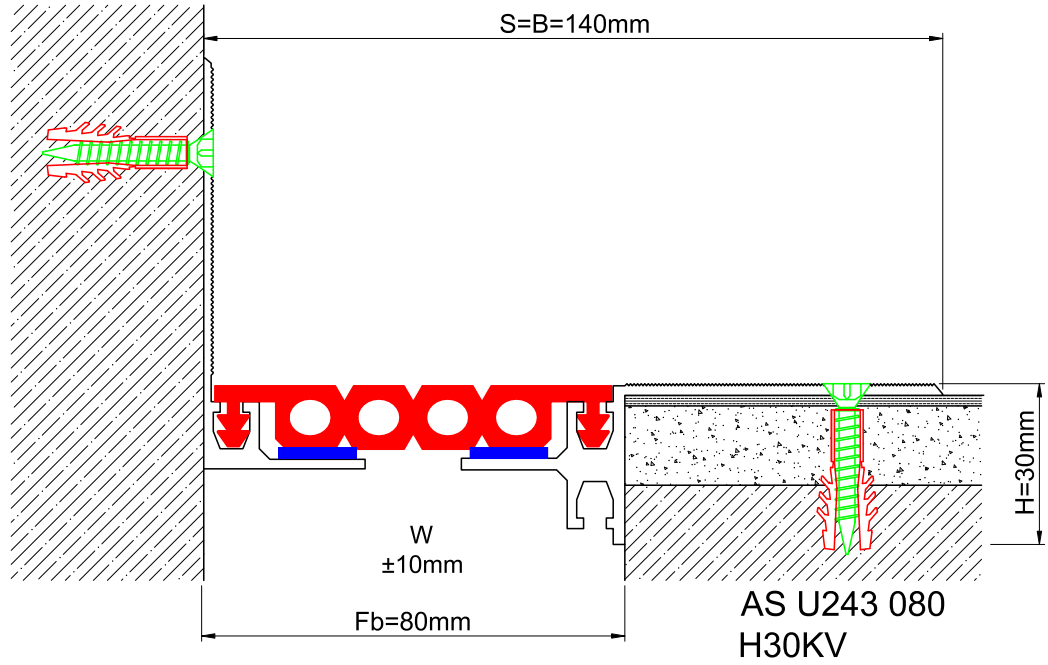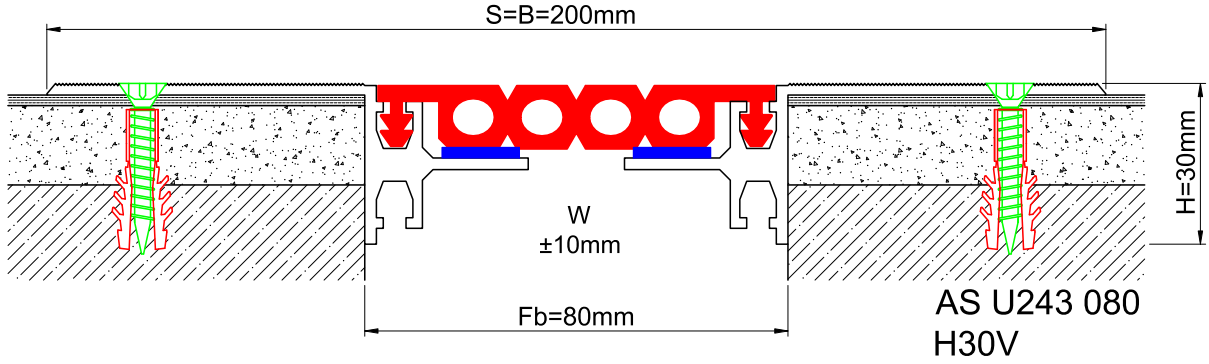

| Profil No Profile Number | AS U243 080 | AS U243 080K |
|---|---|--------------|
| Fb (mm) | 80 | 80 |
| H (mm) yaklaşık approx. | 30 | 30 |
| W± (mm) yaklaşık approx. | ±10 | ±10 |
| Renk Color | Alüminyum: Natürel, Filtiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, Termoplastik Kauçuk (gri ve diğer) Aluminum, Thermoplastic Rubber (grey and others) | |
| Standart Uzunluk Standard Length | 3 | |
| Yükleme Kapasitesi Load-Bearing Capacity |  | |