



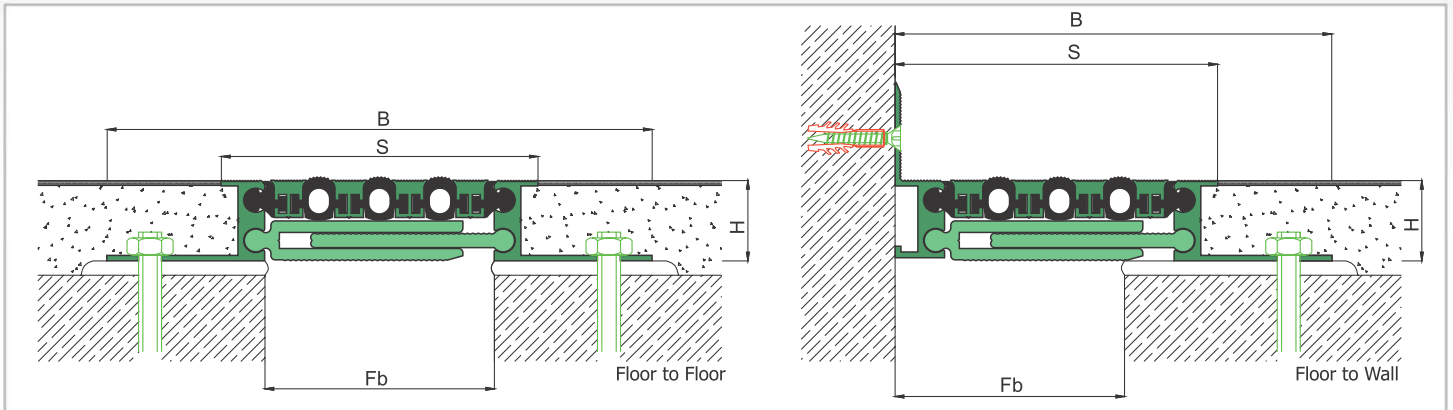

AS A226 flush mounted profile can easily be applied to all types of floors and load bearing capacity is designed for cars or pedestrians depending on the gap inquired. Adjustable interlocking profile and gasket configuration makes it available for very large openings and enables to meet displacements in 3 directions. If inquired, AS A226 can be applied with wall type AS A126 and this dual application brings in a decorative aspect. Profiles are delivered factory-assembled.

- Application Areas** : Indoor & Outdoor / Floor
Ideal for : Car Parks, Shopping Malls, Airports, Residences, Hospitals, Hotels, Public & Commercial Buildings etc.
Material : Mill Finish Aluminum (Anodizing optional), TPE Gasket
Aluminum Alloy : 6063 AA-USA / EN AW 6063
Optional Supplies : Fire Barrier, Waterproof EPDM membrane


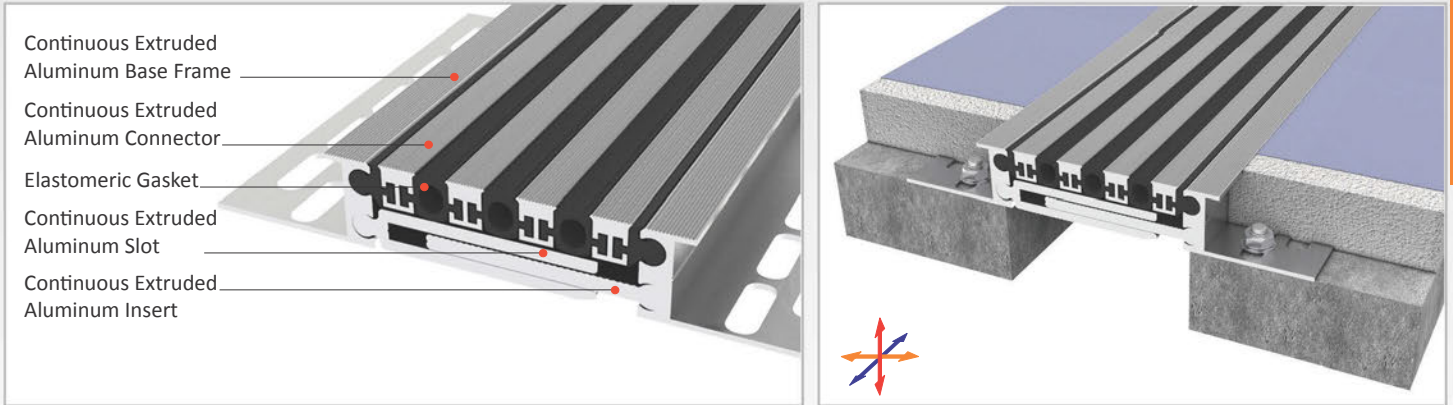



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.



| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|----------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Floor to Floor | AS A226-040 | 40 | 28 | 150 | 70 | ± 4 | | 3 |
| | AS A226-060 | 60 | 28 | 170 | 90 | ± 6 | | 3 |
| | AS A226-080 | 80 | 28 | 190 | 110 | ± 8 | | 3 |
| | AS A226-100 | 100 | 28 | 210 | 130 | ± 10 | | 3 |
| | AS A226-120 | 120 | 28 | 230 | 150 | ± 12 | | 3 |
| | AS A226-140 | 140 | 28 | 256 | 176 | ± 14 | | 3 |
| | AS A226-160 | 160 | 28 | 278 | 199 | ± 16 | | 3 |
| | AS A226-180 | 180 | 28 | 298 | 219 | ± 18 | | 3 |
| | AS A226-200 | 200 | 28 | 318 | 238 | ± 20 | | 3 |

Note: Please ask for different sizes

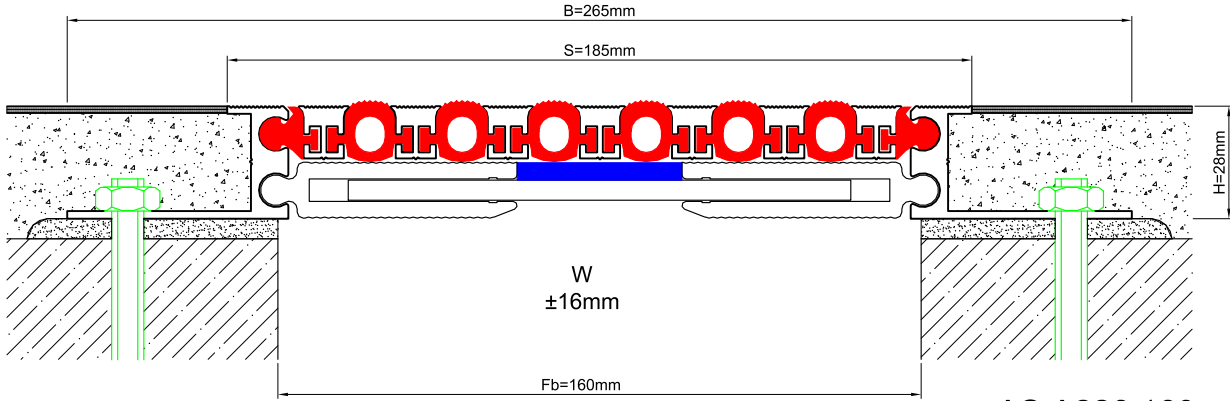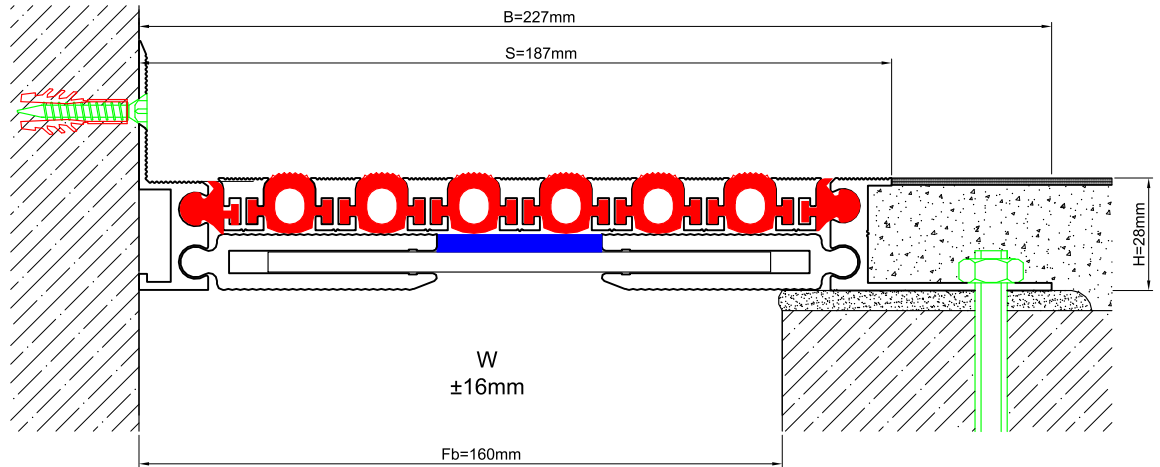
 AS A226 160
 H28D

 AS A226 160
 H28KD

| Profil No Profile Number | AS A226 160 | AS A226 160K |
|---|--|--------------|
| Fb (mm) | 160 | 160 |
| H (mm) yaklaşık approx. | 28 | 28 |
| W± (mm) yaklaşık approx. | ±16 | ±16 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, TPE Termoplastik Elastomer Aluminum, TPE Thermoplastic Elastomer | |
| Standart Uzunluk Standard Length | 3 | |
| Yükleme Kapasitesi Load-Bearing Capacity |  | |