
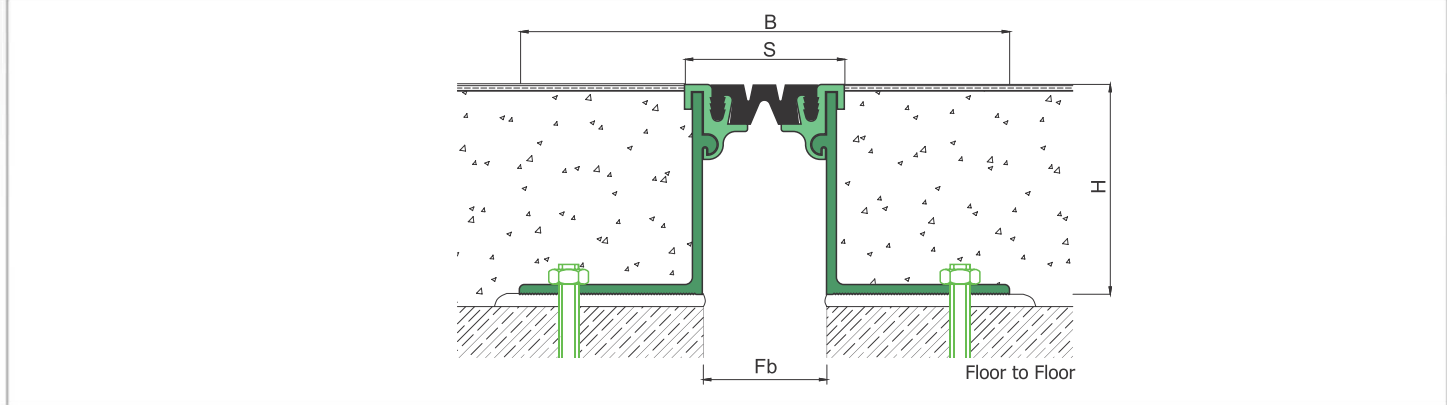


AS A286 flush floor profile is applicable to all types of floors and is designed for heavy vehicles. If needed, Push-down elastomeric gasket can be changed without demounting the profile. Click-fit profile structure lets the profile to be installed at different heights by changing the base frame and makes it favorable for the places where high profiles needed. Punched base frame lets the profile to be installed in an easy, quick and secured way.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Factories, Warehouses, Car Parks, Airports, Shopping Malls etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

FLOOR

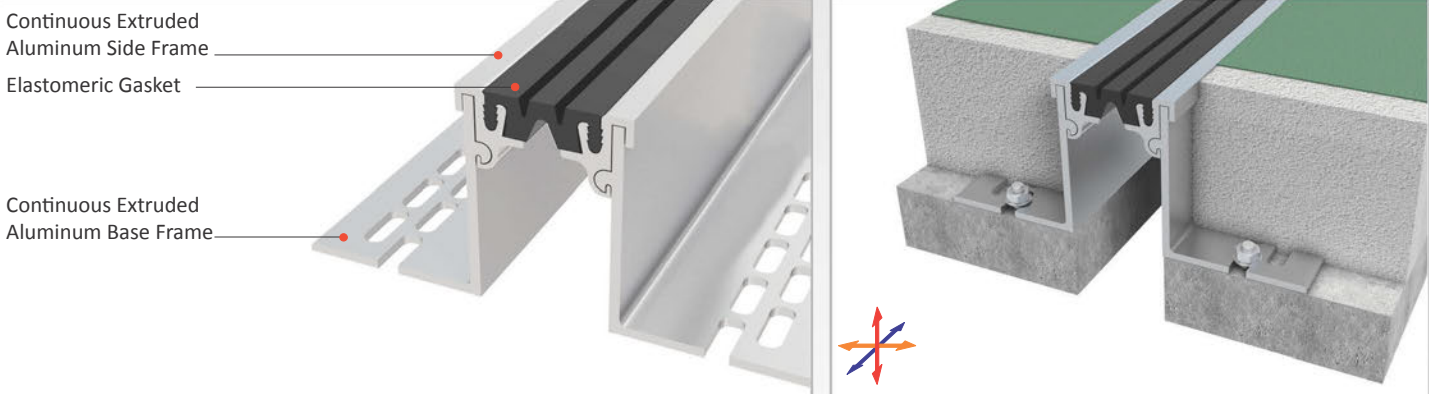


\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.


COLOR BLACK

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS A286-050	50	85 / 100	198	65	+10 / -6	35 kN  300 kN	3

Note: Please ask for different sizes



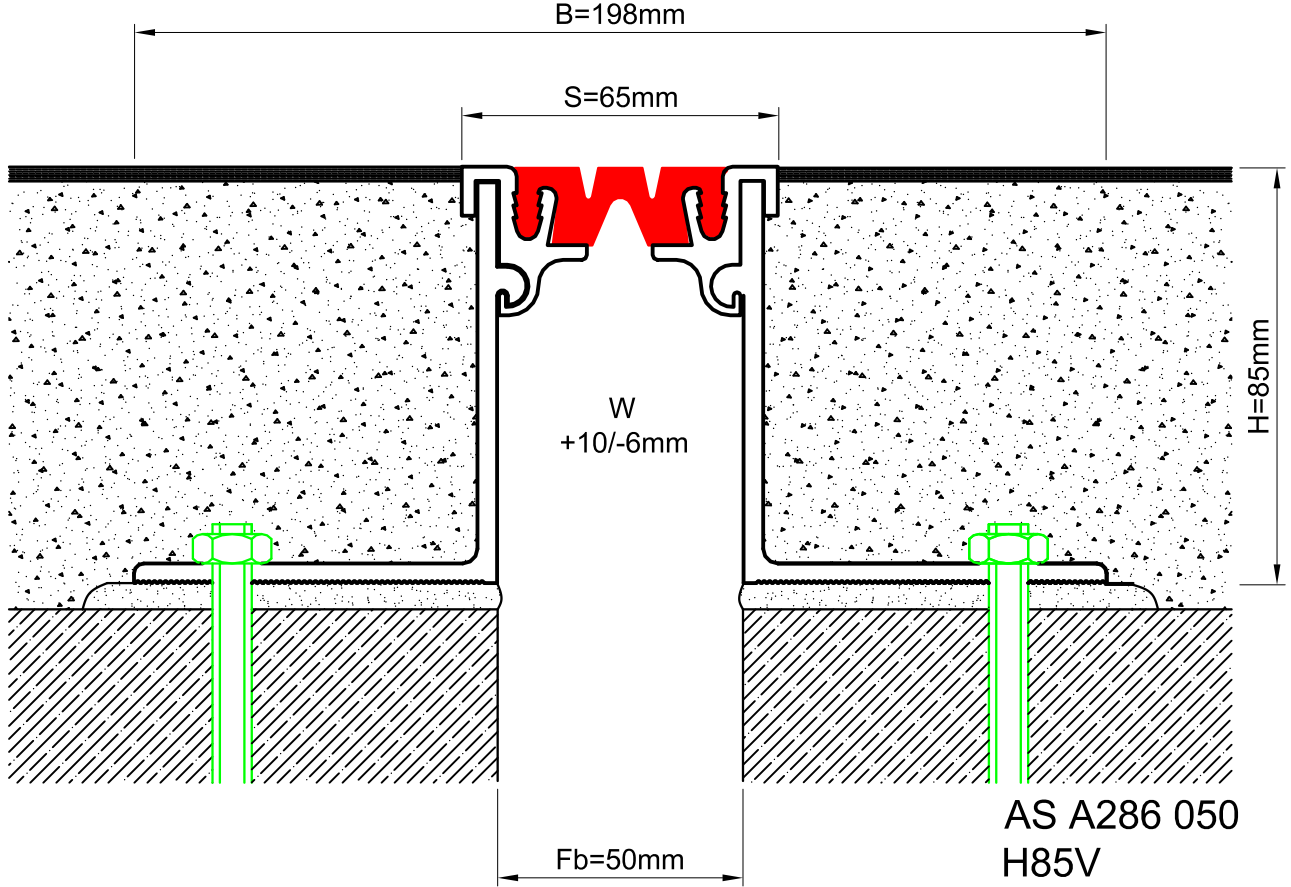

Profil No Profile Number	AS A286 050	
Fb (mm)	50	
H (mm)	yaklaşık approx.	85
W± (mm)	yaklaşık approx.	+10/-6
Renk Color	Alüminyum: Natürel, Fitiller: Siyah Aluminum: Natural, Inserts: Black	
Malzeme Material	Alüminyum, EPDM Kauçuk (siyah) Aluminum, EPDM Rubber (black)	
Standart Uzunluk (m) Standard Length (m)	3	
Yükleme Kapasitesi Load - Bearing Capacity	35 kN  300kN 