

AS U160 surface mounted overall metal cover can easily be applied to all types of parallel wall and ceiling and gives a decorative aspect to the places with invisible screwing system. Base clip is screwed on the surface from one side and the snap-on cover is placed on it. Easy installation, decorative view, high movement ability & maintenance-free characteristics makes AS U160 a favorable profile. It can be aligned with floor covers.


Application Areas : Indoor & Outdoor / Wall & Ceiling

Ideal for : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.


Material : Anodized Aluminum Cover ( Powder Coating optional ), Mill Finish Aluminum Base Clip, EPDM Gasket

Aluminum Alloy : 6063 AA-USA / EN AW 6063

**Optional Supplies**: Fire Barrier, Waterproof EPDM membrane

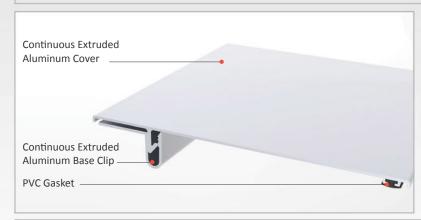



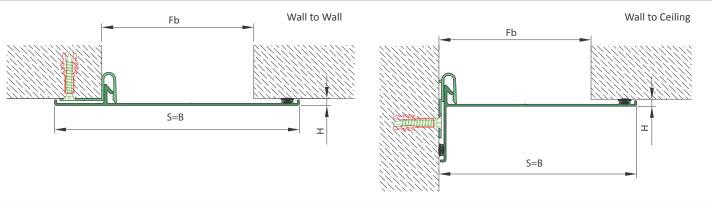

\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U160-050	50	5	111	111	+25/-40	N/A	3
	AS U160-100	100	5	161	161	+25/-90	N/A	3
	AS U160-150	150	5	211	211	+25/-140	N/A	3


Note: Please ask for different sizes







## Sismik Duvar&Tavan Profilleri Seismic Wall&Ceiling Profiles AS U160 200 H5V

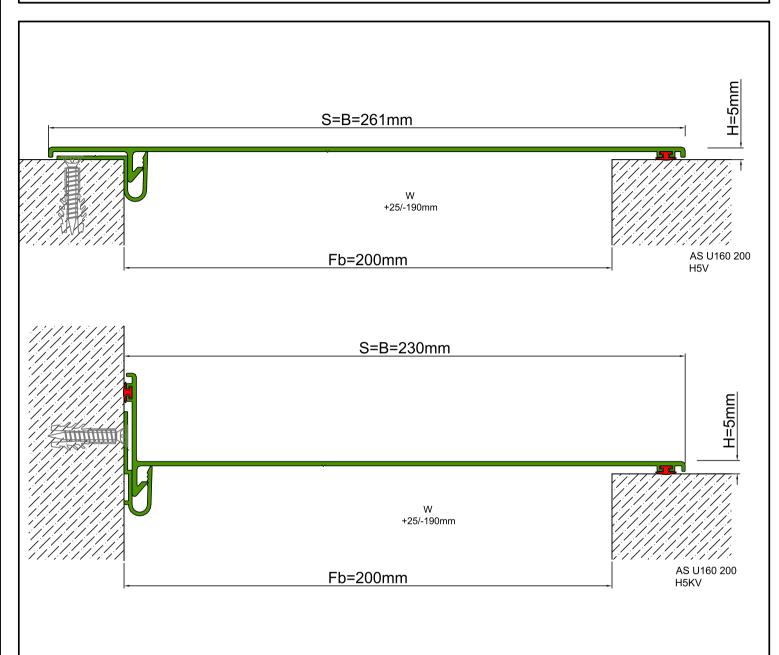

Profil No Profile Number	AS U160 200	AS U160 200K			
Fb (mm)	200	200			
H (mm) yaklaşık approx.	5	5			
W± (mm) yaklaşık approx.	+25/-190	+25/-190			
Renk Color	Alüminyum Kapak: Eloksalli , Alüminyum Bağlantı Parçası: Natürel , Fitiller: Siyah Aluminum Cover: Anodized , Aluminum Base Clip: Natural , Inserts:Black				
Malzeme Material	Alüminyum, EPDM Kauçuk Aluminum, EPDM Rubber				
Standart Uzunluk (m) Standard Length (m)	3				