




AS A239 model seismic profiles are designed for interior and exterior applications and provide horizontal and lateral shear movements at large openings. They can be applied with many different types of finishes (granite, marble, ceramic etc.) at different thickness. During the seismic based contractions, specially designed pop-up mechanism ascends the center plate without damaging the finish placed on it and gets back to origin after activity is over. In case of continuous displacements caused by ground settlements, if needed, upper and lower brackets can easily be changed with a more compatible one. They are ideal for the places with heavy pedestrian traffic and high earthquake risk.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Factories, Warehouses, Car Parks, Airports, Shopping Malls etc. : Mill Finish Aluminum
- Material** (Anodizing optional), EPDM Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

SEISMIC


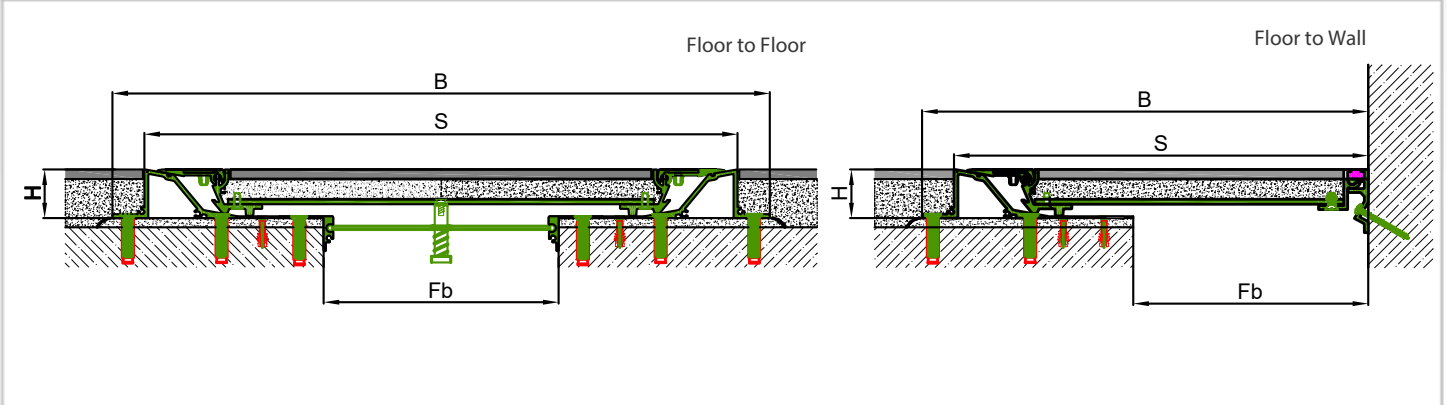



*Visuals are representative and the profile configuration may differ depending on the characteristics requested

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS A239-075	075	50	422	356	+25/-45		3
	AS A239-100	100	50	447	381	+35/-60		3
	AS A239-150	150	50	497	431	+55/-105		3
	AS A239-200	200	50	577	511	+75/-140		3
	AS A239-250	250	50	627	561	+95/-180		3

Note: Please ask for different sizes



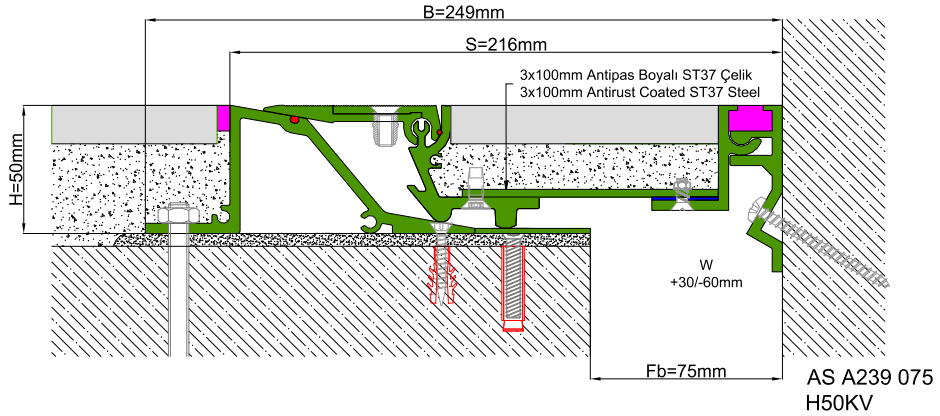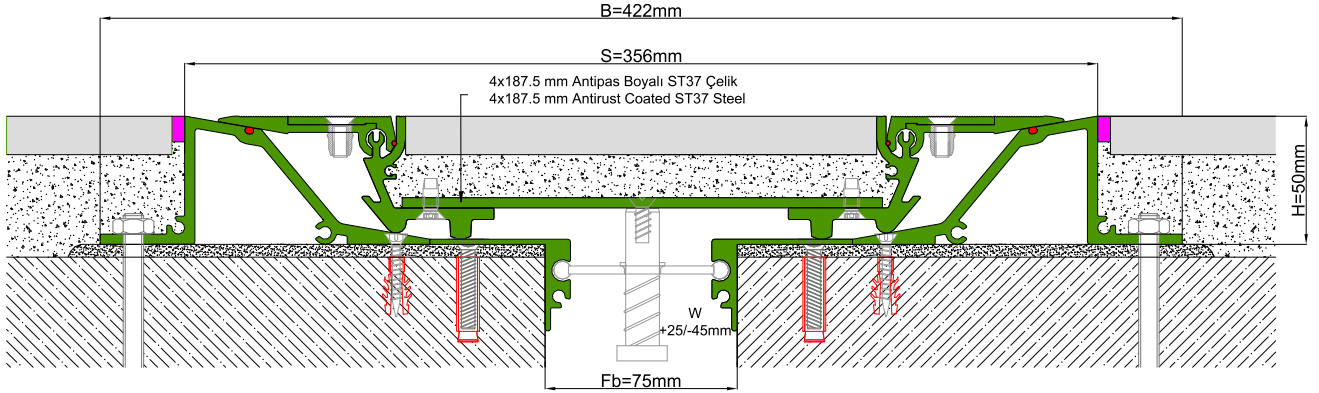

Profil No Profile Number	AS A239 075	AS A239 075K
Fb (mm)	75	75
H (mm) yaklaşık approx.	50	50
W± (mm) yaklaşık approx.	+25/-45	+30/-60
Renk Color	Alüminyum: Natürel, Antipas Boyalı ST37 Çelik: Gri Aluminum: Natural, Antirust Coated ST37 Steel: Grey	
Malzeme Material	Alüminyum, ST37 Çelik Aluminum, ST37 Steel	
Standart Uzunluk Standard Length	3	
Yükleme Kapasitesi Load-Bearing Capacity	 10 kN Temizlik Aracı 10 kN Cleaning Machine	