





AS A256 model seismic profiles are designed for interior and exterior applications and provide horizontal and lateral shear movements at large openings. They can be applied with many different types of finishes (granite, marble, ceramic etc) at different thicknesses. During the seismic based contractions, specially designed pop-up mechanism ascends the center plate without damaging the finish placed on it and gets back to origin after activity is over. Thermal expansion or contraction doesn't activate the center plate. Unlike AS A250 model, interchangeable TPE gasket is used to cover the space between base frame and center plate. They are ideal for the places with heavy pedestrian traffic and high earthquake risk. Movement ability can be increased by using long type turnbar.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), Galvanized Steel, TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

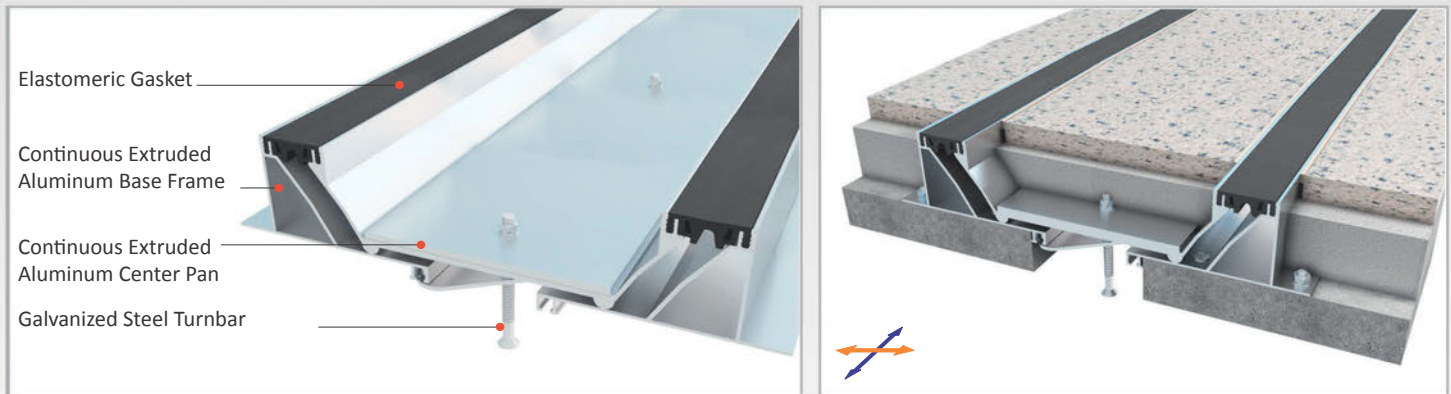

SEISMIC


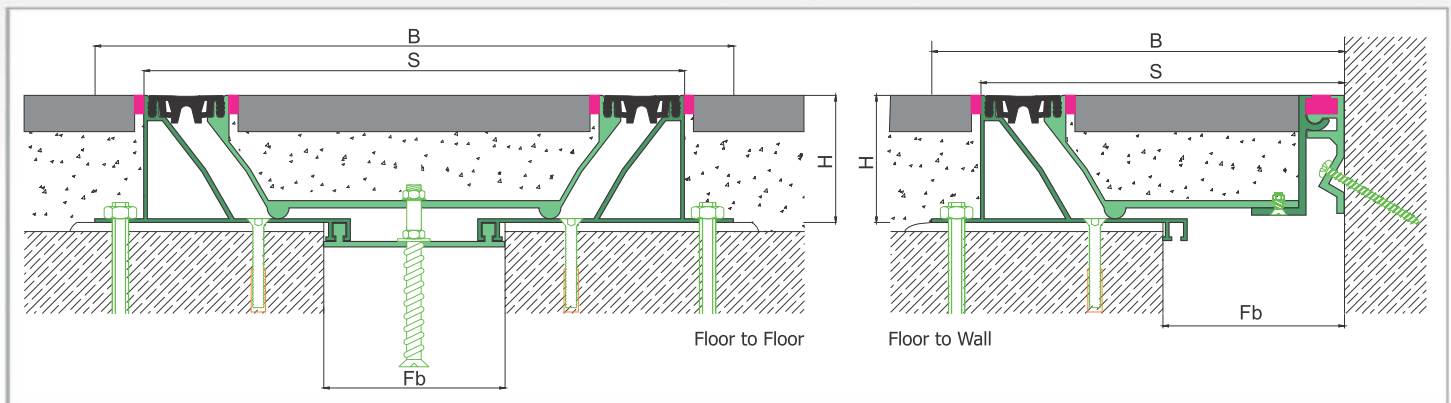


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS: **BLACK** / GREY / BEIGE / Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS A256 -080	80	45	313	259	+55 / -25		3
	AS A256 -100	100	45	333	279	+35 / -45		3
	AS A256 -100	100	70	352	298	+40 / -50		3
	AS A256 -150	150	45	383	329	+55 / -50		3
	AS A256 -200	200	45	433	382	+75 / -50		3
	AS A256 -200	200	70	452	398	+40 / -50		3
	AS A256 -250	250	45	483	432	+75 / -50		3
	AS A256 -300	300	45	539	485	+75 / -50		3

Note: Please ask for different sizes

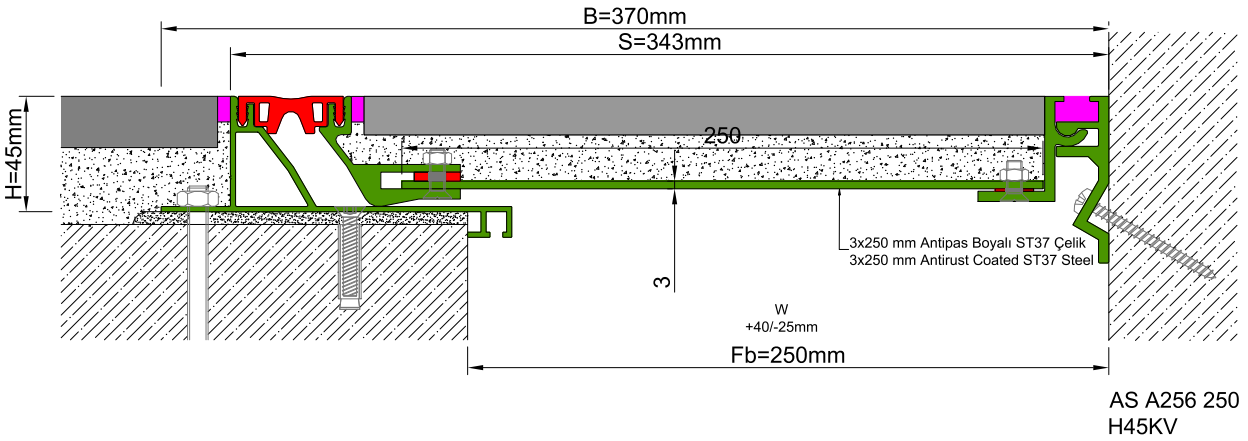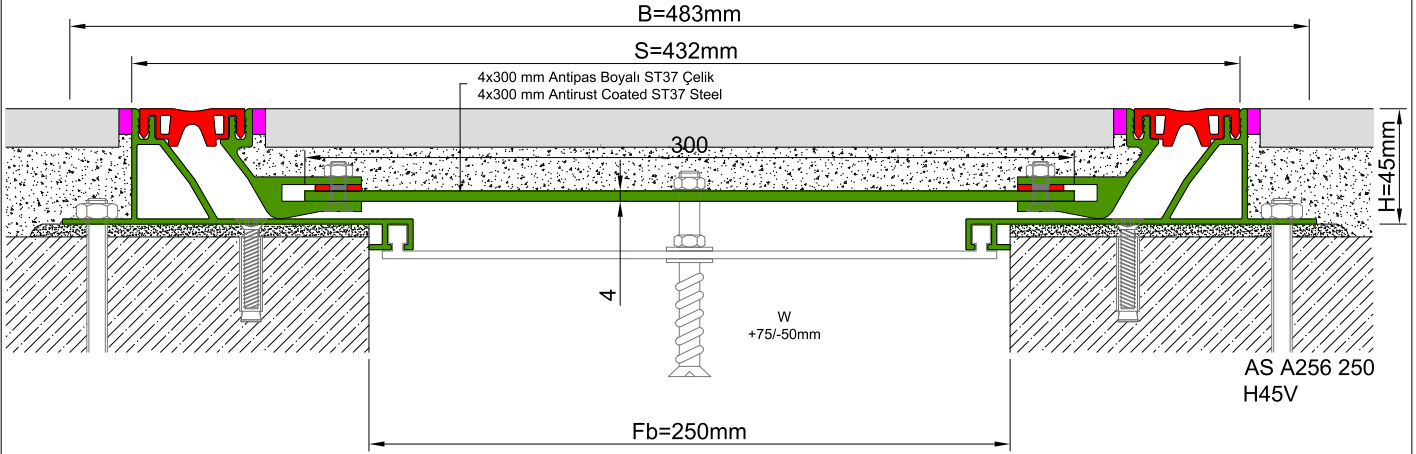

Profil No Profile Number	AS A256 250	AS A256 250K
Fb (mm)	250	250
H (mm) yaklaşık approx.	45	45
W± (mm) yaklaşık approx.	+75/-50	+40/-25
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer, Çelik: Gri Aluminum: Natural, Inserts: Black, grey, others, Steel: Grey	
Malzeme Material	Alüminyum, Termoplastik Kauçuk (gri ve diğer), Antipas Boyalı ST37 Çeliği Aluminum, Thermoplastic Rubber (grey and others), Antirust Coated ST37 Steel	
Standart Uzunluk Standard Length	3	
Yükleme Kapasitesi Load-Bearing Capacity	