
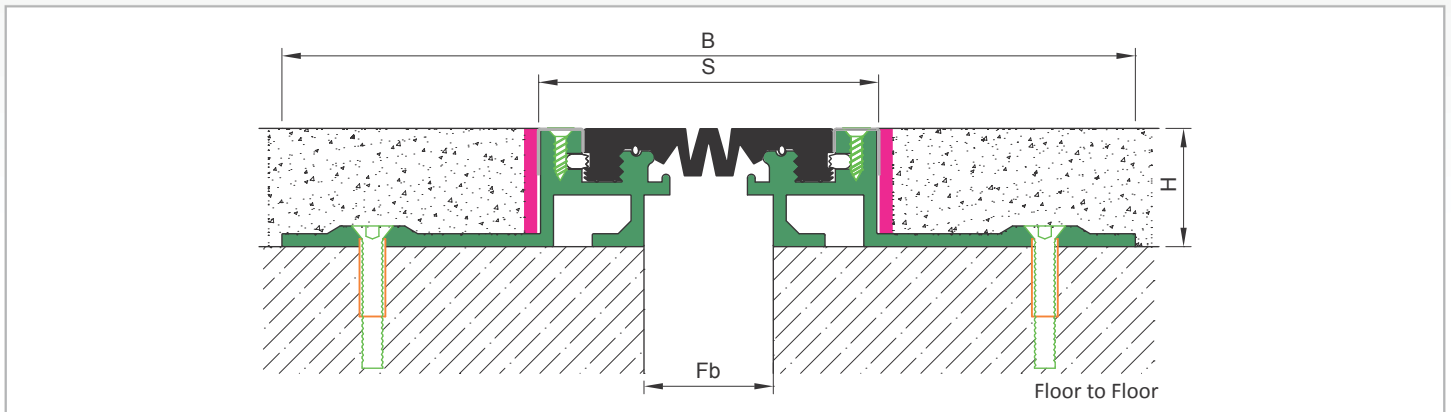


AS A289 flush mounted profile is applicable to all types of floors and load capacity is designed for forklifts and trucks. 3 mm water swelling round profile is placed into the gasket at full length and gains the profile watertight characteristic. Snap-on stainless steel cap at visible surface gives a decorative aspect. Elastomeric gasket ensures high movement ability.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Factories, Warehouses, Car Parks, Airports, Shopping Malls etc.
- Material** : Mill Finish Aluminum (Anodizing optional), Stainless Steel, EPDM Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier

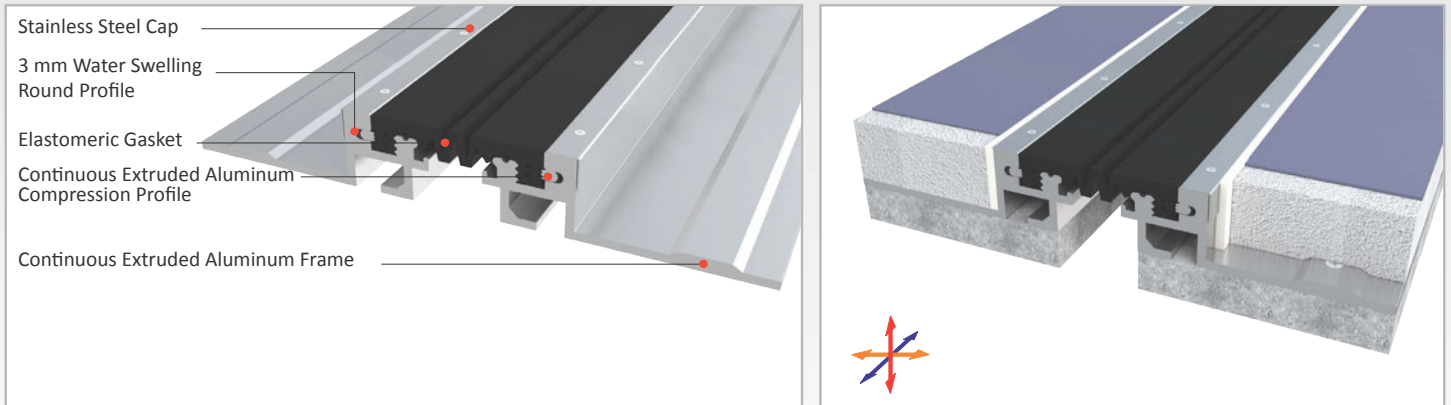


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.


RUBBER COLOR **BLACK**

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Floor to Floor	AS A289-050	50	45	330	130	±10	70 kN 600 kN	3

Note: Please ask for different sizes

WATERTIGHT FLOOR

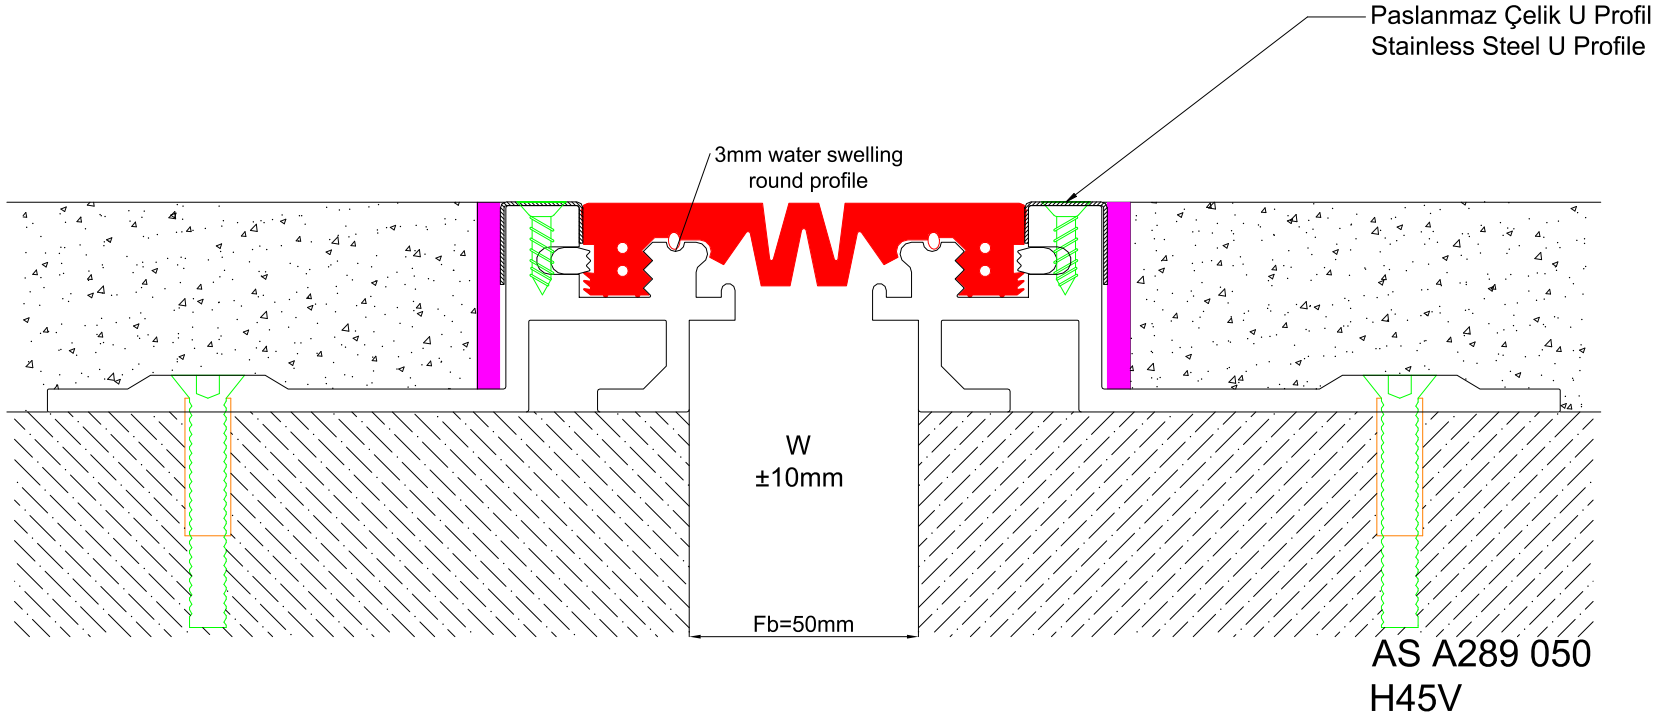

Profil No Profile Number	AS A289 050
Fb (mm)	50
H (mm) yaklaşık approx.	45
W± (mm) yaklaşık approx.	±10
Renk Color	Alüminyum: Natürel, Fitiller: Siyah Aluminum: Natural, Inserts: Black
Malzeme Material	Alüminyum, EPDM Kauçuk (siyah), Paslanmaz Çelik Aluminum, EPDM Rubber (black), Stainless Steel
Standart Uzunluk (m) Standard Length (m)	3
Yükleme Kapasitesi Load - Bearing Capacity	70 kN  600kN 