

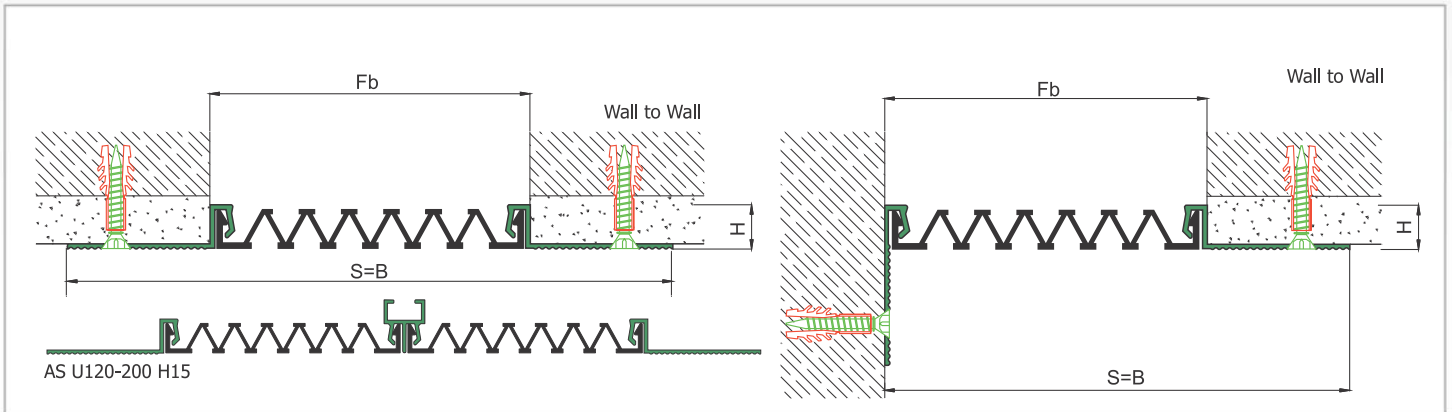


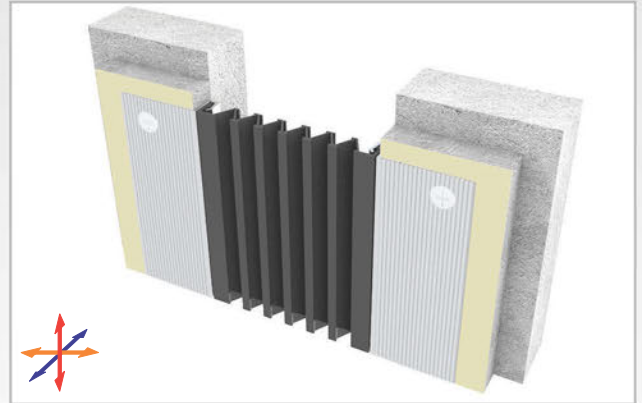

AS U120 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Ribbed elastomeric gasket gains the profile a remarkable movement ability and compensates level differences on both sides of the wall. Slide-in gasket system lets the profile to be used at exterior applications as well as interior areas. Profiles up to 150 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a connector profile.

- Application Areas** : Indoor & Outdoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

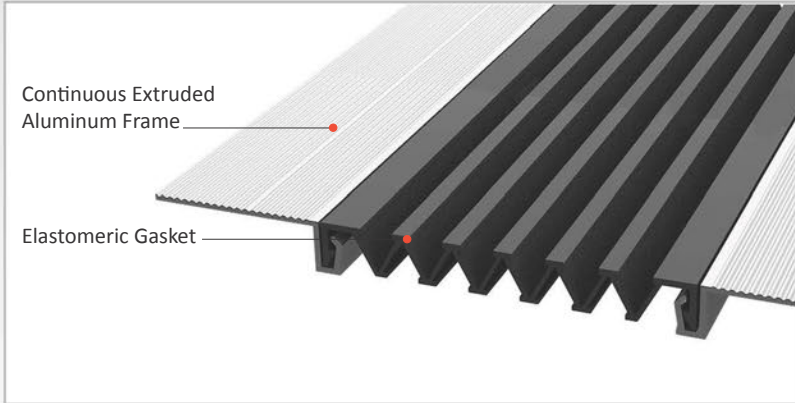


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.


GASKET COLORS: BLACK GREY BEIGE Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U120-030	30	15	119	119	+10 / -6	N/A	3
	AS U120-050	50	15	139	139	+20 / -15	N/A	3
	AS U120-080	80	15	169	169	+40 / -30	N/A	3
	AS U120-100	100	15	189	189	+20 / -50	N/A	3
	AS U120-120	120	15	209	209	+60 / -50	N/A	3
	AS U120-150	150	15	239	239	+30 / -80	N/A	3
	AS U120-200	200	15	289	289	+40 / -100	N/A	3
	AS U120-200M	200	15	289	289	+40 / -100	N/A	3

Note: Please ask for different sizes

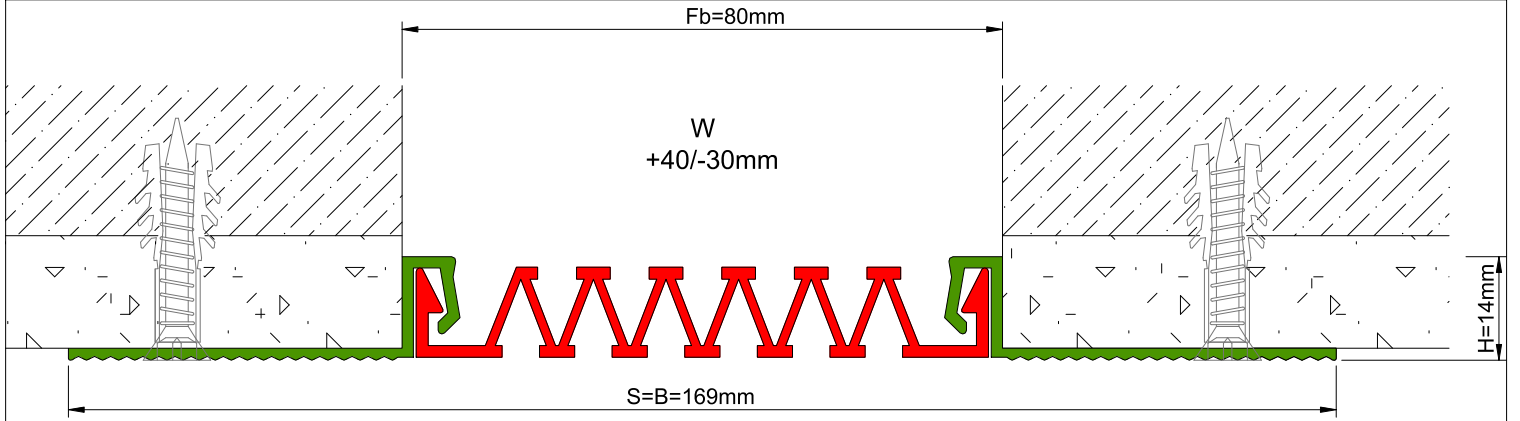

AS U120 080 H15V

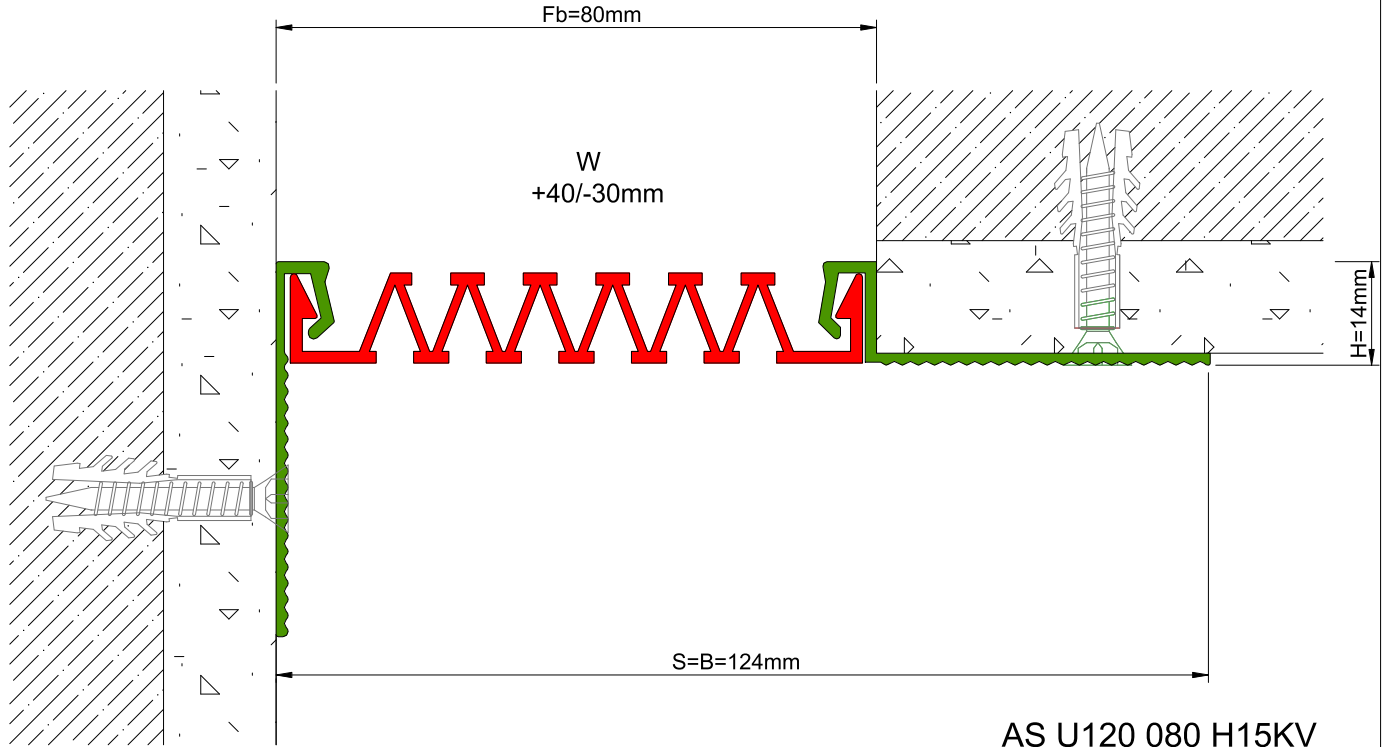

AS U120 080 H15KV

Profil No Profile Number	AS U120 080	AS U120 080K
Fb (mm)	85	85
H (mm)	15	15
W± (mm)	+40/-30	+40/-30
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri,diğer Aluminum: Natural,Inserts:Black,gre,y,others	
Malzeme Material	Alüminyum, EPDM Kauçuk(siyah),Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber(black),Thermoplastic Rubber (grey and others)	
Standart Uzunluk Standard Length	3	