



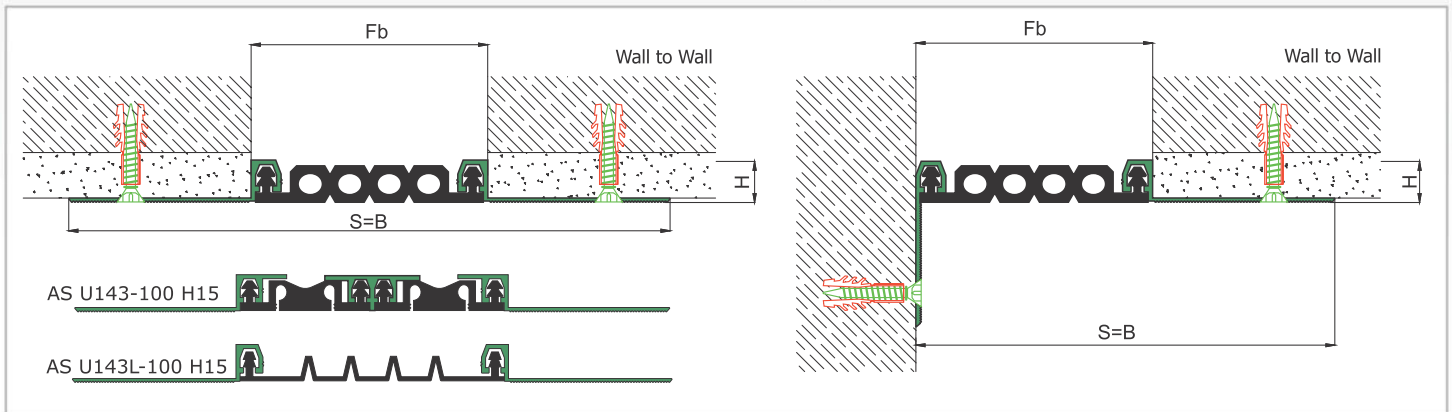

AS U143 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Push-down elastomeric gasket can be changed without demounting the profile. Smooth type gasket is available for some dimensions but with less movement capability compared to grooved type. Profile is designed quite wide compared to AS U120, AS U122 and AS AS U145 models and is ideal for the walls with damaged corners. Profiles up to 80 mm gap are manufactured with single gasket while the wider ones are with double gaskets joined with a connector profile. For some gaps, profile is able to be applied with floor type AS U243 and this dual application brings in a decorative aspect.

- Application Areas** : Indoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

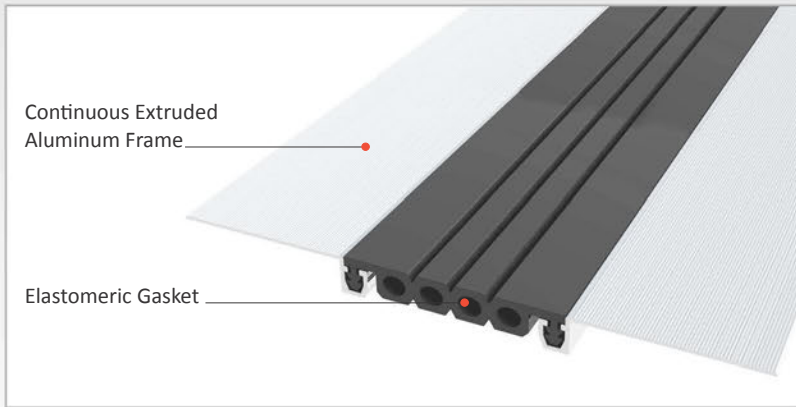



\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS    **BLACK**    GREY    **BEIGE**    Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U143-030	30	15	150	150	± 5	N/A	3
	AS U143-050	50	15	170	170	± 7	N/A	3
	AS U143-080	80	15	200	200	± 10	N/A	3
	AS U143-100	100	15	220	220	± 14	N/A	3
	AS U143 L-050	50	15	170	170	+16 / -8	N/A	3
	AS U143 L-080	80	15	200	200	± 20	N/A	3
	AS U143 L-100	100	15	220	220	+30 / -20	N/A	3

Note: Please ask for different sizes

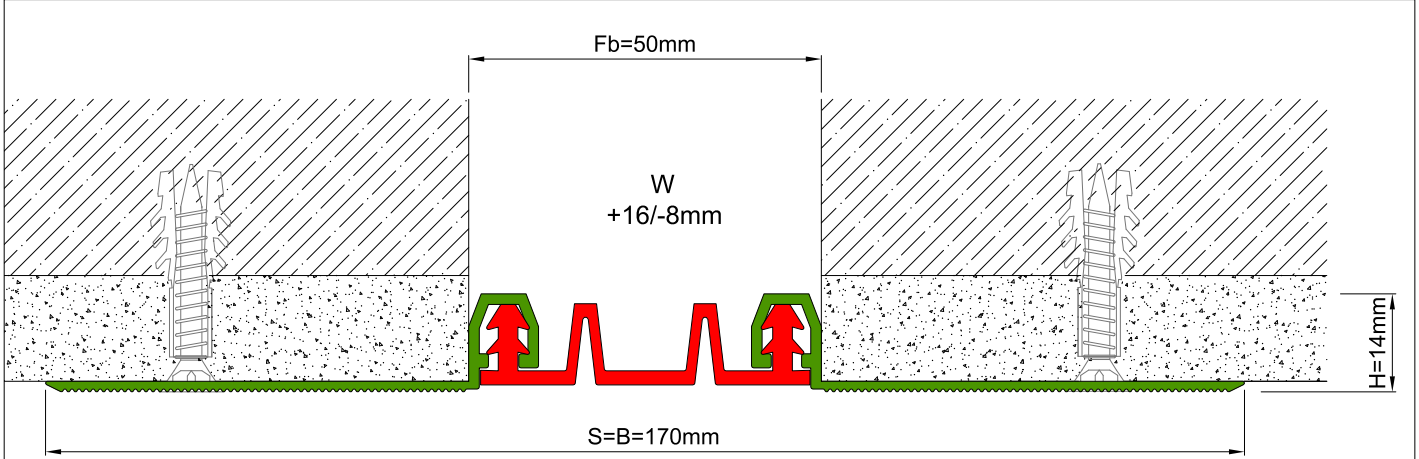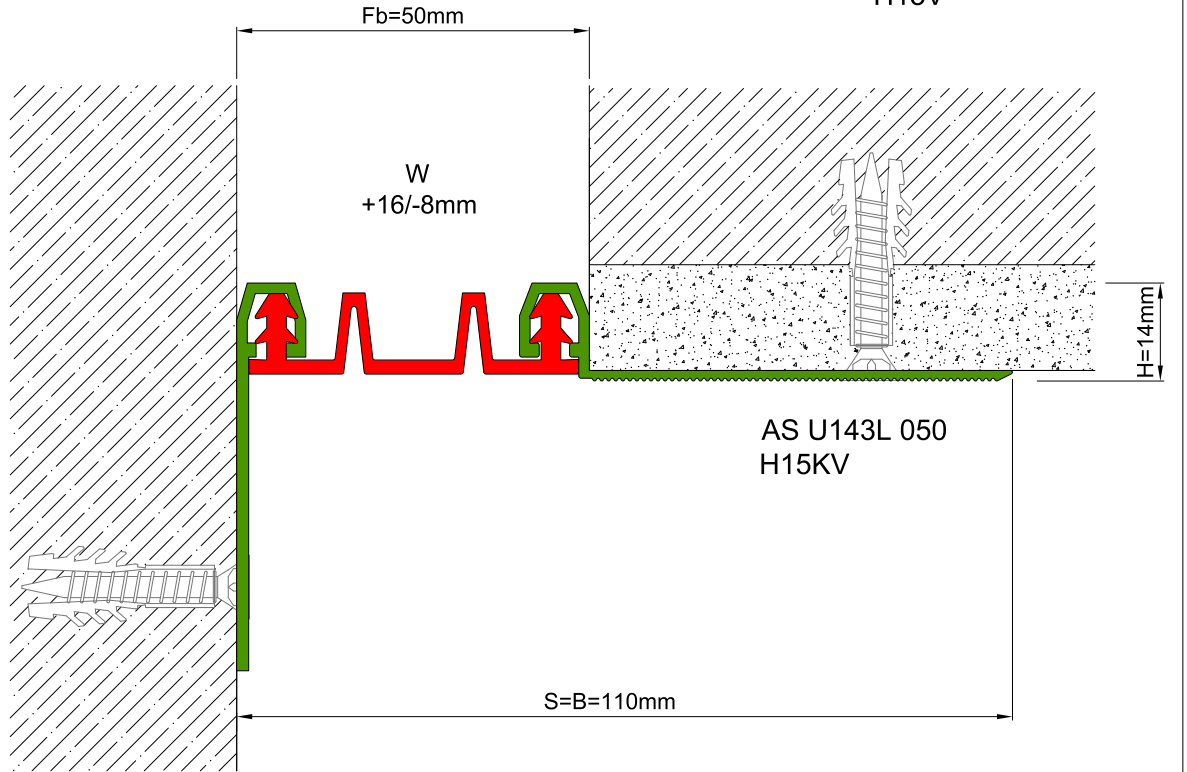


 AS U143L 050  
 H15V

 AS U143L 050  
 H15KV

Profil No Profile Number	AS U143L 050	AS U143L 050K
Fb (mm)	050	050
H (mm) yaklaşık approx.	15	15
W± (mm) yaklaşık approx.	+16/-8	+16/-8
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminum: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, TPE Termoplastik Elastomer Aluminum, TPE Thermoplastic Elastomer	
Standart Uzunluk Standard Length	3	