
Asprofil AS A155 MODEL Seismic Wall & Ceiling Profile





AS A155 profile is designed for wall & ceiling applications at indoor areas as well as exterior wall applications. It functions as a seismic profile and gives a decorative aspect with invisible screwing system. Base frames of the profile are fixed on the surface at both sides and the movable center plate meets the displacements. It can be used as surface or flush mounted. EPDM Cord placed between cover and center plates tighten the plates and eliminate metal stroking noise. For exterior applications, please inform Asteknik before placing an order.

| Application Areas | : Indoor & Outdoor / Wall & Ceiling |
|--------------------------|---|
| Ideal for | : Airports, Shopping Malls, Residences, Hospitals, Hotels, Commercial & Public Buildings etc. |
| Material | : Anodized Aluminum, EPDM Cord |
| Aluminum Alloy | : 6063 AA-USA / EN AW 6063 |
| Optional Supplies | : Fire Barrier, Waterproof EPDM membrane |

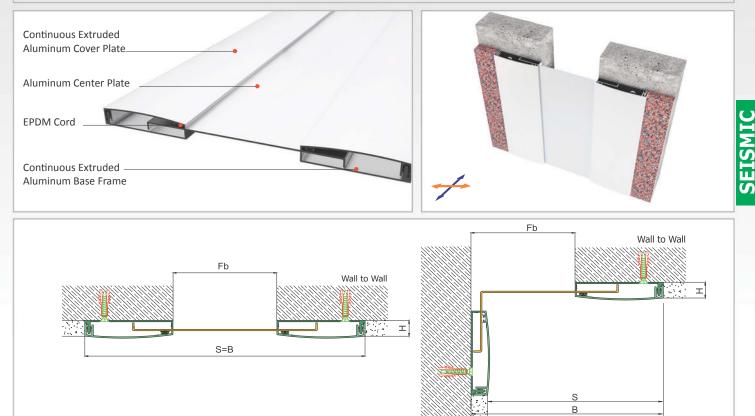

* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|--------------|----------------|------------------|----------------------------|----------------------------|--------------------|------------------|----------------------------|
| Wall to Wall | AS A155L-050 | 50 | 16 | 220 | 220 | +70/-50 | N/A | 3 |
| | AS A155-050 | 50 | 16 | 220 | 220 | +70/-50 | N/A | 3 |
| | AS A155L-080 | 80 | 16 | 250 | 250 | +70/-75 | N/A | 3 |
| | AS A155L-100 | 100 | 16 | 270 | 270 | +70/-75 | N/A | 3 |
| | AS A155-100 | 100 | 16 | 270 | 270 | +70/-75 | N/A | 3 |
| | AS A155L-150 | 150 | 16 | 320 | 320 | ±35 | N/A | 3 |
| | AS A155-150 | 150 | 16 | 320 | 320 | +70/-75 | N/A | 3 |
| | AS A155L-200 | 200 | 16 | 370 | 370 | ±35 | N/A | 3 |
| | AS A155L-250 | 250 | 16 | 420 | 420 | ±35 | N/A | 3 |
| | AS A155L-300 | 300 | 16 | 470 | 470 | ±35 | N/A | 3 |

Note: Please ask for different sizes


AS A155L series' center plates are manufactured from aluminum sheet

Turkey Joint of Civilizations





Sismik Duvar&Tavan Profilleri Seismic Wall&Ceiling Profiles AS A155 100 H16

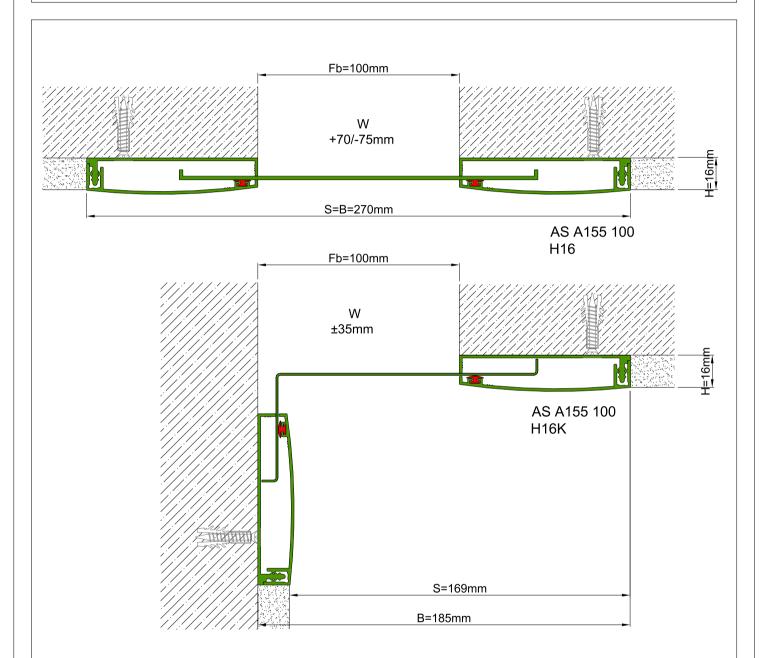

| Profil No Profile Num | ber | AS A155 100 | AS A155 100K | | | |
|-------------------------------------|---------------------|---|--------------|--|--|--|
| Fb (mm) | | 100 | 100 | | | |
| H (mm) | yaklaşık approx. | 16 | 16 | | | |
| W± (mm) | yaklaşık approx. | +70/-75 | ±35 | | | |
| Renk Color | | Alüminyum Orta ve Üst Kapak: Eloksallı, Alüminyum Bağlantı Elemanı: Natürel, Fitiller: Siyah Aluminum Center and Cover Plate: Anodised, Aluminum Base Frame: Natural,Inserts:Black | | | | |
| Malzeme Material | | Alüminyum, EPDM Kauçuk(siyah) Aluminum, EPDM Rubber(black) | | | | |
| Standart Uzunluk Standard Length | | 3 | | | | |